



KRAMER ELECTRONICS LTD.

USER MANUAL

MODEL:

907xl
Power Amplifier/Mixer


P/N: 2900-300028 Rev 1

907xl Quick Start Guide

This page guides you through a basic installation and first-time use of your **907xl**. For more detailed information, see the **907xl** User Manual. You can download the latest manual at <http://www.kramerelectronics.com>.

Step 1: Check what's in the box

- 907xl** Power Amplifier/Mixer
- 1 Power supply (24V DC)
- 4 Rubber feet
- 1 Quick Start sheet
- 1 User Manual




Save the original box and packaging in case your **907xl** needs to be returned to the factory for service.

Step 2: Install the 907xl

Mount the machine in a rack (using the RK-1 rack adapter) or place on a table.

Step 3: Connect the inputs and outputs

Always switch off the power on each device before connecting it to your **907xl**.

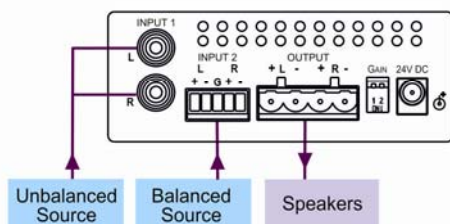


Always use Kramer high-performance cables for connecting AV equipment to the **907xl**.

Step 4: Connect the power

Connect the 24V DC power adapter to the **907xl** and plug the adapter into the mains electricity.



Step 5: Operate the 907xl

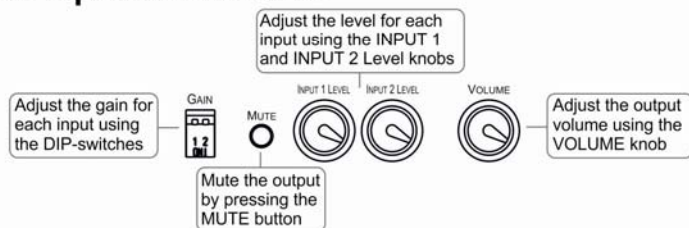

Contents

1	Introduction	1
2	Getting Started	2
2.1	Achieving the Best Performance	2
3	Overview	3
3.1	Defining the 907xl Power Amplifier/Mixer	3
4	Connecting the 907xl Power Amplifier/Mixer	5
4.1	Connecting the Stereo Audio Input	6
5	Technical Specifications	7

Figures

Figure 1:	907xl Power Amplifier/Mixer	4
Figure 2:	Connecting the 907xl Power Amplifier/Mixer	6
Figure 3:	Connecting the Balanced Stereo Audio Input	6
Figure 4:	Connecting the Unbalanced Stereo Audio Input	6

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront the video, audio, presentation, and broadcasting professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Our 1,000-plus different models now appear in 11 groups that are clearly defined by function: GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Matrix Switchers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters and GROUP 11: Sierra Products.

Congratulations on purchasing your Kramer **907xl** *Power Amplifier/Mixer*, which is ideal for the following typical applications:

- Presentation rooms and multimedia applications for quick, local audio amplification
- Personal audio listening (for example, a PC and portable CD player)

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
 - Use Kramer high performance high resolution cables
 - Use only the power cord that is supplied with this machine



Go to <http://www.kramerelectronics.com> to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).



Caution: No operator serviceable parts inside the unit

Warning: Use only the Kramer Electronics input power wall adapter that is provided with the unit

Warning: Disconnect the power and unplug the unit from the wall before installing

2.1 Achieving the Best Performance

To achieve the best performance:

- Use only good quality connection cables to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality
- Position your Kramer **907xl** away from moisture, excessive sunlight and dust

3 Overview

The Kramer MultiTOOLS™ **907xl** is a high-performance, 40W RMS per channel, Class D power amplifier/mixer for line-level stereo audio signals. It accepts a balanced stereo audio signal on a terminal block connector. It delivers 150 watts per channel of music output to the speakers.

The **907xl** features:

- One unbalanced stereo audio input on RCA connectors
- One balanced stereo audio input on a terminal block connector
- Input volume adjustment for each input for mixing capability
- One speaker output on a terminal block connector
- Gain control DIP-switches
- A mute button
- 24V DC power

3.1 Defining the 907xl Power Amplifier/Mixer

This section defines the **907xl**.

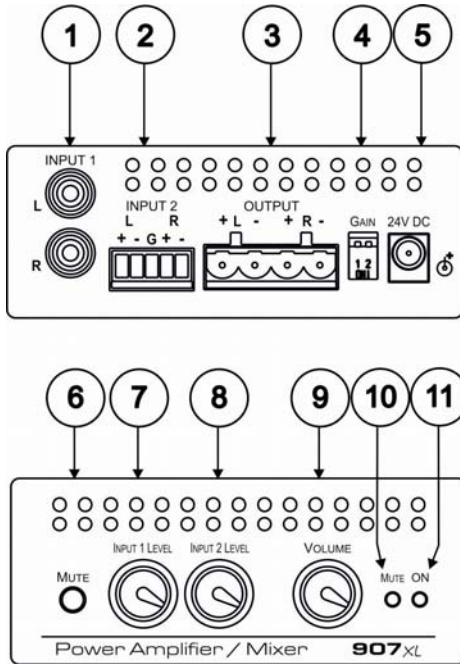


Figure 1: 907xl Power Amplifier/Mixer

#	Feature	Function
1	INPUT 1 RCA Connectors	Connect to an unbalanced stereo audio source
2	INPUT 2 Terminal Block Connector	Connect to a balanced stereo audio source
3	OUTPUT Terminal Block Connector	Connect to a balanced stereo acceptor (speakers)
4	GAIN DIP-switches	4-position switch for setting the basic gain level
5	24V DC Connector	+24V DC for powering the unit
6	MUTE Pushbutton	Press to disable/enable the audio output
7	INPUT 1 LEVEL Knob	Turn to raise or lower the input 1 volume
8	INPUT 2 LEVEL Knob	Turn to raise or lower the input 2 volume
9	VOLUME Knob	Turn to raise or lower the output volume
10	MUTE LED	Lights yellow when the volume is disabled
11	ON LED	Lights green when receiving power

4 Connecting the 907xl Power Amplifier/Mixer

To connect the **907xl** as illustrated in the example in [Figure 2](#):







Always switch off the power to each device before connecting it to your **907xl**. After connecting your **907xl**, connect its power and then switch on the power to each device.

1. Connect the unbalanced stereo audio source (for example, a stereo audio player) to the INPUT 1 RCA connectors.
2. Connect the balanced stereo audio source (for example, a stereo audio player) to the INPUT 2 terminal block connector.
3. Connect the OUTPUT terminal block connectors to the acceptors (a pair of speakers).



Do not ground the loudspeakers.

4. Connect the 24V DC power adapter to the power socket and connect the adapter to the mains electricity (not shown in [Figure 2](#).)
5. If necessary adjust the basic volume level by setting the GAIN DIP-switches as shown here.

DIP-Switch Gain Levels				
Switch				
Setting	00	01	10	11
Gain	20dB	26dB	32dB	36dB

6. Adjust the output volume by turning the VOLUME potentiometer.

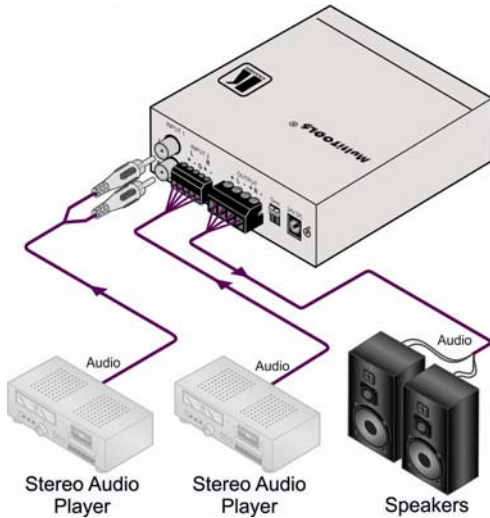


Figure 2: Connecting the 907xl Power Amplifier/Mixer

4.1 Connecting the Stereo Audio Input

[Figure 3](#) and [Figure 4](#) illustrate how to wire a balanced/unbalanced input connection:




Figure 3: Connecting the Balanced Stereo Audio Input




Figure 4: Connecting the Unbalanced Stereo Audio Input

5 Technical Specifications

INPUT:	1 balanced stereo audio on a terminal block connector, 1 unbalanced stereo audio on RCA connectors
OUTPUT:	Speaker output on a terminal block connector
OUTPUT POWER:	40W per channel into 8Ω
OUTPUT MUSIC POWER:	150W per channel into 8Ω
INPUT SENSITIVITY:	1.2Vrms
AMPLIFIER TYPE:	Class D
VOLTAGE GAIN:	36dB (x10)
BANDWIDTH (-3dB):	25kHz
S/N RATIO:	66dB
COUPLING:	Inputs: AC, Outputs: DC
AUDIO THD + NOISE:	1.2%
AUDIO 2nd HARMONIC:	1%
POWER SOURCE:	24V DC, 2A
CONTROLS:	2 gain DIP-switches, mute button, 2 input level knobs, 1 volume knob
OPERATING TEMPERATURE:	0° to +55°C (32° to 131°F)
STORAGE TEMPERATURE:	-45° to +72°C (-49° to 162°F)
HUMIDITY:	10% to 90%, RHL non-condensing
DIMENSIONS	10.7cm x 10.4cm x 4.0cm (4.2" x 4.1" x 1.6") W, D, H
WEIGHT:	0.32kg (0.7lbs)
ACCESSORIES:	Power supply
OPTIONS:	RK-1 19" rack mount adapter
Specifications are subject to change without notice at http://www.kramerelectronics.com	

LIMITED WARRANTY

We warrant this product free from defects in material and workmanship under the following terms.

HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by us or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site www.kramerelectronics.com.
2. Any product, on which the serial number has been defaced, modified or removed, or on which the WARRANTY VOID IF TAMPERED sticker has been torn, reattached, removed or otherwise interfered with.
3. Damage, deterioration or malfunction resulting from:
 - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
 - ii) Product modification, or failure to follow instructions supplied with the product
 - iii) Repair or attempted repair by anyone not authorized by Kramer
 - iv) Any shipment of the product (claims must be presented to the carrier)
 - v) Removal or installation of the product
 - vi) Any other cause, which does not relate to a product defect
 - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installations charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on your product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

NOTE: All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

- EN-50081: "Electromagnetic compatibility (EMC); generic emission standard.
Part 1: Residential, commercial and light industry"
- EN-50082: "Electromagnetic compatibility (EMC) generic immunity standard.
Part 1: Residential, commercial and light industry environment".
- CFR-47: FCC* Rules and Regulations:
Part 15: "Radio frequency devices
Subpart B Unintentional radiators"

CAUTION!

➤ Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.

➤ Use the supplied DC power supply to feed power to the machine.

➤ Please use recommended interconnection cables to connect the machine to other components.

*FCC and CE approved using STP cable (for twisted pair products)



For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing



P/N: 2900-300028



Rev: 1