



Multi Format 4K LCD Monitor

Operation Manual_v1.9

LUM-550M

LUM-430M

Contents

1. Caution	04
2. Main Features	06
3. Controls & Functions	07
4. Menu Tree & Adjustment	11
5. Menu Operations	13
[1] PICTURE	13
[2] VIDEO	14
[3] MARKER	15
[4] GPI	16
[5] NETWORK	17
[6] AUDIO	17
[7] SYSTEM	18
6. Firmware Upgrade	19
7. Video Support Resolution	20
8. Product Specifications	22

1. Caution

- **Always use set voltage.**

- **AC 100 ~ 240V**

- All operating instructions must be read and understood before the product is operated.

- These safety and operating instructions must be kept in safe place for future reference.

- All warnings on the product and in the instructions must be observed closely.

- All operating instructions must be followed.

- Do not use attachments not recommended by the manufacturer. Use of inadequate attachments can result in accidents.

- This product must be operated on a power source specified on the specification label. If you are not sure of the type of power supply used in your home, consult your dealer or local power company. For units designed to operate on batteries or another power source, refer to the operating instructions.

- The power cords must be routed properly to prevent people from stepping on them or objects from resting on them. Check the cords at the plugs and product.

- Do not overload AC outlets or extension cords. Overloading can cause fire or electric shock.

- Never insert an object into the product through vents or openings. High voltage flows in the product, and inserting an object can cause electric shock and/or short internal parts. For the same reason, do not spill water or liquid on the product.

- Do not attempt to service the product yourself. Removing covers can expose you to high voltage and other dangerous conditions. Request a qualified service person to perform servicing.

- If any of the following conditions occurs, unplug the power cord from the DC outlet, and request a qualified service person to perform repairs.

- a. When the power cord or plug is damaged.

- b. When a liquid was spilled on the product or when objects have fallen into the product.

- c. When the product has been exposed to rain or water.

- d. When the product does not operate properly as described in the operating instructions. Do not touch the controls other than those described in the operating instructions. Improper adjustment of controls not described in the instructions can cause damage, which often requires extensive adjustment work by a qualified technician.

- e. When the product has been dropped or damaged.

- f. When the product displays an abnormal condition. Any noticeable abnormality in the product indicates that the product needs servicing.

- In case the product needs replacement parts, make sure that the service person uses replacement parts specified by the manufacturer, or those with the same characteristics and performance as the original parts. Use of unauthorized parts can result in fire, electric shock and/or other danger.

- Upon completion of service or repair work, request the service technician to perform safety checks to ensure that the product is in proper operating condition.

- The power cord plug shall be connected to a MAINS socket outlet with a protective earthing connection.

- Unplug the power cord from the AC outlet when happening any problem in the product.

1. Caution

- When mounting the product be sure to install the product according to the method recommended by the manufacturer.
- Unplug the power cord from the DC outlet before cleaning the product. Use a damp cloth to clean the product. Do not use liquid cleaners or aerosol cleaners.
- Unplug the power cord from the AC outlet if you do not use the product for considerably long time.
- Do not use the product near water, such as bathtub, washbasin, kitchen sink and laundry tub, swimming pool and in a wet basement.
- Keep the product away from direct rays of the Sun-light.
- Do not place the product on an unstable cart, stand, tripod or table. Placing the product on an unstable base can cause the product to fall, resulting in serious personal injuries as well as damage to the product. Use only a cart, stand, tripod, bracket or table recommended by the manufacturer or sold with the product. When mounting the product on a wall, be sure to follow the manufacturer's instruction. Use only the mounting hardware recommended by the manufacturer.
- When relocating the product placed on a cart, it must be moved with the utmost care.
- Sudden stops, excessive force and uneven floor surface can cause the product to fall from the cart.
- The vents and other openings in the cabinet are designed for ventilation. Do not cover or block these vents and openings since insufficient ventilation can cause overheating and/or shorten the life of the product. Do not place the product on a bed, sofa, rug or other similar surface, since they can block ventilation openings. This product is not designed for built-in installation; do not place the product in an enclosed place such as a bookcase or rack, unless proper ventilation is provided or the manufacturer's instructions are followed.
- In case of installation the product on the rack, the inside of the product would be overheated due to heat from other devices near by and the decrease of air circulation, which could damage to the monitor. To prevent the damage, please have enough space for the monitors and use fan to avoid heat and maintain the operating temperature. (Refer to the specification of the product).
- The LCD panel used in this product is made of glass. Therefore, it can break when the product is dropped or applied with impact. Be careful not to be injured by broken glass pieces in case the LCD panel breaks.
- Keep the product away from heat sources such as radiators, heaters, stoves and other heat generating products (including amplifiers).

WARNING



<Main Switch>

- | means Power on when pressing
- means Power off when pressing



<Beside critical components in circuit diagram>

To identify any terminal which is intended for connection to an external conductor for protection against electric shock in case of a fault, or the terminal of a protective earth (ground) electrode.



<Near the main terminal block>

This mark indicates the possibility of injury or damage to property.


2. Main Features

LUM-550M/430M Monitor contains the following features :


- **Compatible with various SDI signal formats**
 - This product is compatible with various SDI signals - 480i, 576i, 1080i, 1080p, 1080psf, 2160p.
- **All-in-one type system**
 - Slim and all-in-one type monitor that requires no additional accessories, for optimized space utilization.
 - This product is suitable for installation in the Studio Wall.
- **Wide Screen support**
 - This product supports native 16:9 aspect ratio.
- **Remote control function**
 - This product can simply be Remote-controlled by cable connection without additional peripheral equipment attached to unit.
 - This product supports TVLogic's Remote Control program.
- **Dual Link Support**
 - Supports Dual Link YCbCr/RGB 4:4:4, YCbCr 422 format
- **Ethernet & USB support**
 - Supports Ethernet and USB connection for easy update of new function and error correction.
- **HDMI input support**
 - Supports HDMI inputs without additional equipment.
- **3G Support**
 - Supports 3G A/B format
- **12G-SDI Support**
 - Supports 12G-SDI format
- **Auto Color Calibration support**
 - Supports Auto Color Calibration by directly connecting the color probes to the product.
- **Optical Support (optional)**
 - Support SDI signal input by connecting optical cable without additional equipment.
- **Additional features**
 - Wide Viewing Angle, Loop Through (SDI), OSD user interface.

3. Controls & Functions

LUM-550M : FRONT

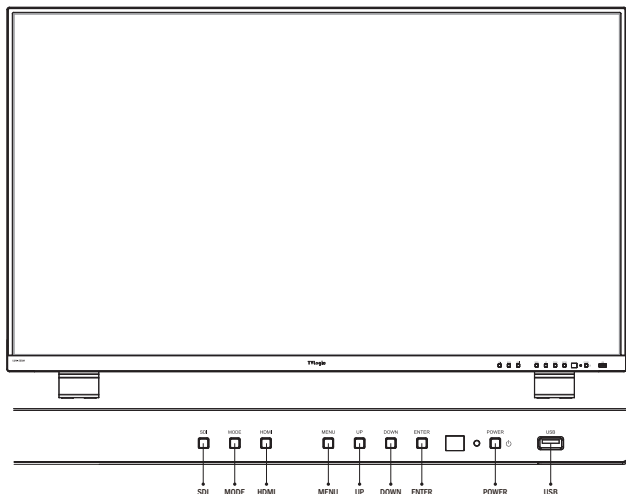


LUM-550M : REAR

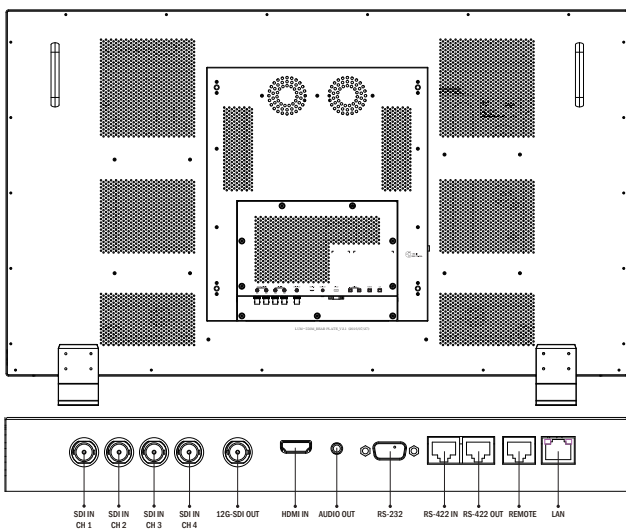


3. Controls & Functions

LUM-430M : FRONT

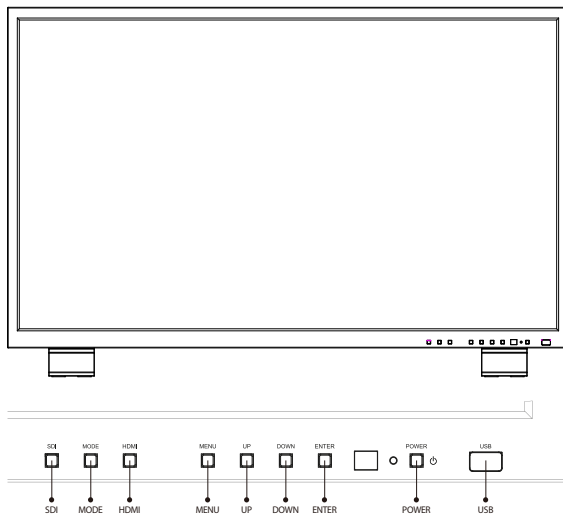

LUM-430M : REAR

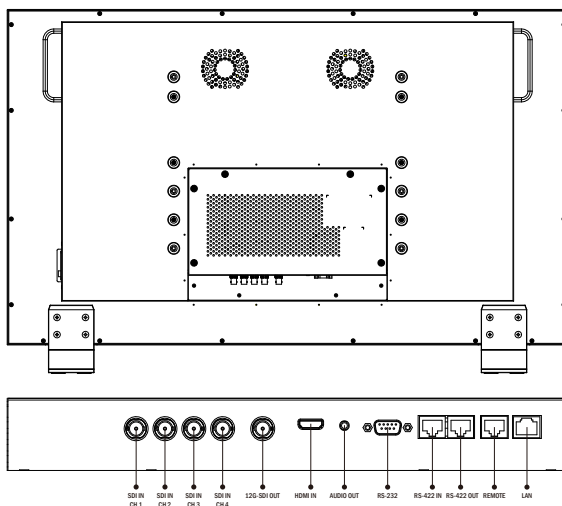

3. Controls & Functions

FRONT

- **[SDI] Button/Lamp**
 - Used to select SDI A/B input signal.
- **[MODE] Button/Lamp**
 - Used to select the UD MODE.
 - Press the button to move through the modes : 2-SAMPLE -> 4 QUAD -> SINGLE
- **[HDMI] Button/Lamp**
 - Used to select HDMI input.
- **[MENU] Button**
 - Used to activate the OSD menu.
- **[UP] Button**
 - Used to move up through the menus during the OSD menu activation.
 - Also used to increase the value of the selected feature.
- **[DOWN] Button**
 - Used to down through the menus during the OSD menu activation.
 - Also used to decrease the value of the selected feature.
- **[ENTER] Button**
 - Used to confirm a chosen value.
- **[POWER] Button/Lamp**
 - Used to turn the power on and off.

3. Controls & Functions

REAR

- **[SDI INPUT x 4] (BNC)**
 - Signal input terminal for HD/SD SDI signal.
 - The first and second SDI INPUT terminal supports up to 12G input.
- **[12G-SDI Output] (BNC)**
 - 12G/3G signal output terminal for HD/SD SDI signal.
- **[HDMI] (HDMI)**
 - Signal input terminal for HDMI signal.
- **[AUDIO OUTPUT] (PHONE JACK)**
 - Audio disembedded signal output.
- **[RS-232 PORT] (RJ-45)**
 - Used to update new program to add new functions and correct errors.
- **[RS-422 PORT] (RJ-45)**
 - Used to control the monitor with a protocol provided by TVLogic.
- **[REMOTE] (RJ-45)**
 - Provides connection to control equipment for external monitor control.
 - Features can be changed in the GPI section of the OSD menu.
- **[LAN]**
 - Used to control the monitor with a protocol provided by TVLogic.

- **~ AC IN**
 - 100 ~ 240V AC 50/60Hz

<Warning!!>

When using the product make sure to ground, whenever possible, before connecting the input signal cable in order to prevent any possible damage to the product or connected devices. The damage may include signal noise, malfunction of main board or display panel. And the connected devices such as camera or video source player may also be influenced through signal cable. Please check if the AC power source and the power extender or power distributor is grounded.

4. Menu Tree & Adjustment

[1] Menu Organization

- The product may be controlled and set system-wise through OSD displayed on the screen.
- Below is the layout of the product's menu.

PICTURE	BRIGHT	0
COLOR	CONTRAST	0
MARKER	BACK LIGHT	30
GPI	TIMECODE	OFF
NETWORK	4K MODE	2 SAMPL INTL
AUDIO		
SYSTEM		

<MAIN MENU> <SUB MENU> <VALUE MENU>

[3] Menu Control Sequence

Menu Control sequence follows the order below:

1. Press the MENU button to activate the OSD menu.
2. Move to a desired menu with the UP/DOWN button.
3. Press the ENTER button to select a menu and move to a sub-menu with the UP/DOWN button.
4. Press the ENTER button to select the desired sub-menu. (The selected sub-menu's font color will be changed to blue.)
5. Press ENTER button to save the new value after adjusting the value with UP/DOWN button. (The changed font color will be returned to default(white).)
6. Press the MENU button to return to the previous menu and if there is no previous menu, the OSD menu will be removed from the screen.

[2] Menu Control

- You may control various functions using MENU, UP, DOWN, ENTER buttons on the bottom front of the monitor and GPI CONTROLLER PC REMOTE CONTROL S/W.

4. Menu Tree & Adjustment

[4] MENU TREE

PICTURE	BRIGHT
	CONTRAST
	BACK LIGHT
	TIMECODE
	FORCE PSF
	4K MODE
COLOR	TEMP
	GAIN R
	GAIN G
	GAIN B
	BIAS R
	BIAS G
	BIAS B
	COLOR COPY
MARKER	MARKER
	CENTER MARKER
	SAFETY AREA
	FIT MARKER
	MARKER MAT
	MARKER COLOR
	THICKNESS
	USER MARKER H1
	USER MARKER H2
	UAER MARKER V1
	USER MARKER V2

GPI	GPI 1 ~ GPI 8
	GROUP ID
	MONITOR ID
	RS-422 BAUD
MARKER	DHCP
	IP ADDR
	SUBNET
	GATEWAY
	PORT
AUDIO	IP APPLY
	VOLUME
	AUD CH
	LVM TYPE
	LVM SIZE
SYSTEM	DEFAULT
	USER CONFIG
	KEY LED
	SDI OUT
	VERSION
	INPUT
	NETWORK
	MAC ADDR
	SW UPGRADE

5. Menu Operations

[1] PICTURE

PICTURE	BRIGHT	0
COLOR	CONTRAST	0
MARKER	BACK LIGHT	30
GPI	TIMECODE	OFF
NETWORK	4K MODE	2 SAMPL INTL
AUDIO		
SYSTEM		

- **BRIGHT**

- Used to set the brightness(=offset) level from -100 to 100.

- **CONTRAST**

- Used to set the contrast(gain) level from -100 to 100.

- **BACK LIGHT**

- Used to control the brightness of the LCD panel backlight from 0 to 127.

- **FORCE PSF**

- Force PSF setting. The setting mode is ON, OFF.

- **4K MODE**

- Used to set the 2 SAMPLE INTERLEAVE, 4 INPUT QUAD and SINGLE.

5. Menu Operations

[2] COLOR

PICTURE	TEMP	6500K
COLOR	GAIN R	0
MARKER	GAIN G	0
GPI	GAIN B	0
NETWORK	BIAS R	0
AUDIO	BIAS G	0
SYSTEM	BIAS B	0
	COLOR COPY	-

● TEMP

- Controls the color temperature and allows instant access to preset the color temperature settings.
- Available color temperatures are 9300K, 6500K, 5600K, 5000K, 3200K and USER 1/2/3.
- In USER 1/2/3 modes, user can define custom RGB GAIN, BIAS and COLOR COPY values.

● GAIN R

- Used to set Red Gain(or Picture, Contrast) level from -128 to 127.
- Adjusts the red color of bright section.
- Only available in Custom 1/2/3 mode.

● GAIN G

- Used to set Green Gain(or Picture, Contrast) level from -128 to 127.
- Adjusts the green color of bright section.
- Only available in Custom 1/2/3 mode.

● GAIN B

- Used to set Blue Gain(or Picture, Contrast) level from -128 to 127.
- Adjusts the blue color of bright section.
- Only available in Custom 1/2/3 mode.

● BIAS R

- Used to set Red Bias(or Offset, mainly affects on Black level) from -128 to 127.
- Adjusts the red color of dark section.
- Only available in CUSTOM 1/2/3 mode.

● BIAS G

- Used to set Green Bias(or Offset, mainly affects on Black level) from -128 to 127.
- Adjusts the green color of dark section.
- Only available in CUSTOM 1/2/3 mode.

● BIAS B

- Used to set Blue Bias(or Offset, mainly affects on Black level) from -128 to 127.
- Adjusts the blue color of dark section.
- Only available in CUSTOM 1/2/3 mode.


● COLOR COPY

- Used to copy the R/G/B Gain value of pre-stored color temperature settings.
- In User mode, find and select the color temperature to be used with the UP/DOWN button and press the Enter button to copy and apply the Gain value to GAIN RED, GAIN GREEN, GAIN BLUE.
- Only available in CUSTOM 1/2/3 mode.

5. Menu Operations

[3] MARKER

PICTURE	MARKER	OFF
COLOR	CENTER MARKER	OFF
MARKER	SAFETY AREA	OFF
GPI	FIT MARKER	OFF
NETWORK	MARKER MAT	OFF
AUDIO	MARKER COLOR	WHITE
SYSTEM	THICKNESS	1
	USER MARKER H1	0
	USER MARKER H2	0
	USER MARKER V1	0
	USER MARKER V2	0

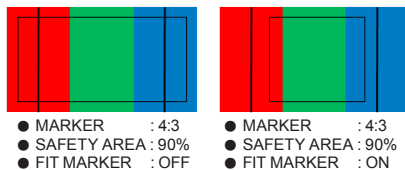

● MARKER

- Used to select the marker type when the MARKER is displayed on the screen.

MODE	MARKER CLASS
HD	16:9, 4:3, 15:9, 14:9, 13:9, 1.85:1, 2.35:1, USER
SD 16:9	
SD 4:3	16:9, 4:3, 15:9, 14:9, 13:9, 1.85:1, 2.35:1, USER

● CENTER MARKER

- Used to select the availability of the CENTER MARKER on the screen.

● SAFETY MARKER

- Used to select and control the size and availability of the SAFETY AREA.
- Available types are 80%, 85%, 88%, 90%, 93%, 100%, EBU ACTION 16:9, EBU GRAPHIC 16:9, EBU ACTION 14:9, EBU GRAPHIC 14:9, EBU ACTION 4:3 and EBU GRAPHIC 4:3.

● FIT MARKER

- Used to activate or inactivate the FIT MARKER function.
- When the Marker type is selected in the Marker menu, a border line of the Safety Area will be displayed inside the Marker.
- FIT MARKER ON/OFF displays as shown below.

● MARKER MAT

- Used to set the darkness level outside of the MARKER area.
- Available values are from OFF(transparent) to 7(Black).

● MARKER COLOR

- Used to control the color of MARKER lines.
- Available colors are White, Yellow, Cyan, Green, Magenta, Red, Blue, Black and Adaptive.

● THICKNESS

- The item controls the thickness of the MARKER lines.
- The degrees of thickness are between 1 ~ 4.

● USER MARKER H1

- Used to set the position of the first horizontal marker line.
- Displayed when MARKER menu is set to USER.

● USER MARKER H2

- Used to set the position of the second horizontal marker line.
- Displayed when MARKER menu is set to USER.

● USER MARKER V1

- Used to set the position of the first vertical marker line.
- Displayed when MARKER menu is set to USER.

● USER MARKER V2

- Used to set the position of the second vertical marker line.
- Displayed when MARKER menu is set to USER.

5. Menu Operations

[4] GPI

PICTURE	PIN 1	NONE
COLOR	PIN 2	SDI A
MARKER	PIN 3	SDI B
GPI	PIN 4	16:9 MAR
NETWORK	PIN 5	15:9 MAR
AUDIO	PIN 6	14:9 MAR
SYSTEM	PIN 7	POW ON/OFF
	PIN 8	GND
	GROUP ID	0
	MONITOR ID	0
	RS-422 BAUD	9600

● GPI 1 ~ 8

- This item activates/ deactivates the REMOTE function.
- The user may designate a function for each pin and each pin's default setting is as follows.

PIN 1 : HDMI

PIN 2 : SDI-A

PIN 3 : SDI-B

PIN 4 : 16:9 MAR

PIN 5 : 15:9 MAR


PIN 6 : 14:9 MAR

PIN 7 is Power ON/OFF use only, GPI 8 is GND.

- Each pin's location is as below.

REMOTE (RJ-45)

- 1: Pin1
- 2: Pin2
- 3: Pin3
- 4: Pin4
- 5: Pin5
- 6: Pin6
- 7: Pin7
- 8: GND



- The selectable functions for PIN 1~ PIN 6 are as follows:

Menu Classification	Settable Values
PIN 1~6	NONE, SDI-A, SDI-B, HDMI, 16:9 MARKER, 4:3 MARKER, 15:9 MARKER, 14:9 MARKER, 13:9 MARKER, 1.85:1 MARKER, 2.35:1 MARKER, CENTER MARKER, SAFETY AREA 80%, SAFETY AREA 85%, SAFETY AREA 88%, SAFETY AREA 90%, SAFETY AREA 93%, SAFETY AREA 100%
PIN 7	POWER ON/OFF CONTROL
PIN 8	GND

5. Menu Operations

[5] NETWORK

PICTURE	DHCP	DHCP
COLOR	IP (D)	192.168.101.156
MARKER	SUBNET	255.255.255.000
GPI	GATWAY	192.168.101.001
NETWORK	PORT	10262
AUDIO	IP APPLY	NO
SYSTEM		

- **DHCP**
 - Used to activate/deactivate the DHCP function.
- **IP (D)**
 - Used to set the IP Address connected to a Monitor.
- **SUBNET**
 - Used to set the Subnet Mask connected to a Monitor.
- **GATWAY**
 - Used to set the Gateway number connected to a Monitor.
- **PORT**
 - Used to set the port number. Default value is 10262.
- **IP APPLY**
 - Use to apply changed value of IP Address, Subnet mask, Gateway and Port no.

[6] AUDIO

PICTURE	VOLUME	15
COLOR	AUD CH	GR1 CH1+CH2
MARKER	LVM TYPE	OFF
GPI	LVM SIZE	MID
NETWORK		
AUDIO		
SYSTEM		

- **VOLUME**
 - Used to control the audio volume. Control range is from 0 to 30 and the default value is 15.
- **AUD CH**
 - Used to set the audio channel.
 - Available ranges are GR1 CH1+CH2, GR1 CH3+CH4, GR2 CH1+CH2, GR2 CH3+CH4, GR3 CH1+CH2, R3 CH3+CH4, GR4 CH1+CH2 and GR4 CH3+CH4.
- **LVM TYPE**
 - Used to set the audio type.
 - Available options are OFF, BOTH H, LEFT H, RIGHT H, BOTH V, LEFT V and RIGHT V.
- **LVM SIZE**
 - Used to control the size of the Audio Level Meters.
 - Available modes are TINY, MID and TALL.

5. Menu Operations

[7] SYSTEM

PICTURE	DEFAULT	NO
COLOR	USER CONFIG	USER 1
MARKER	KEY LED	YES
GPI	SDI OUT	BY PASS
NETWORK	VERSION	S04.F04.H05
AUDIO	INPUT	NO INPUT
SYSTEM	NETWORK	DHCP 100M
	MAC ADDR	20:84:8C
	SW UPGRADE	

● DEFAULT

- Used to initialize OSD values to factory default except for the value of the BACK LIGHT.

● USER CONFIG

- Used to save and apply in three kinds of user configurations.
- Available modes are USER1, USER2 and USER3.
- All items can be assignable for each USER1, USER2 and USER3 settings.

● KEY LED

- Used to control the Key Lamp on the front of the monitor.

● SDI OUT

- Used to change the Throughout on the rear of the monitor to BY PASS or 12G output.
- In BY PASS mode, the selected channel's image is output as it is.
- In 12G signal, output signal is changed to 12G.

● VERSION

- Displays the current program version of the product.
- S : Firmware / F : FPGA / H : Hardware.

● INPUT

- Displays the current input format.

● NETWORK

- Displays the current network connection setting.

● MAC ADDR

- Displays the current network MAC ADDR.

● SW UPGRADE

- Used to upgrade the firmware using the USB (Thumb drive).
- Available options are CPU, FPGA.
When CPU or FPGA is selected, only each program can be upgraded at a time.

6. Firmware Upgrade

[1] FIRMWARE UPGRADE

- The USB(Thumb drive) which contains the F/W file is needed for Firmware Upgrade.
- Select the SW UPGRADE in the SYSTEM menu.
 1. Connect the USB to the USB Slot on the front of the monitor.
 2. Select what to update among CPU / FPGA / ALL in [S/W UPGRADE].
 3. When the USB connection is completed, the S/W upgrade starts and the progress displays on the bottom left side of the screen.
 4. If the USB doesn't connect properly or there is no file in the specified location, the error message will be displayed on the bottom left side of the screen and the upgrade won't start.
 5. In that case, check the USB or the file location and try again.
- After USB connection, turn off and then on the monitor. The upgrade will activate automatically.

7. Video Support Resolution

VIDEO SUPPORT RESOLUTION

Input Signal Interfaces	Signal Format (12G SDI)	
12G-SDI single link(4k)	3840x2160 (50/59.94/60p)	YCbCr 4:2:2 10bit

Input Signal Interfaces	Signal Format (6G SDI)	
6G-SDI single link(4k)	3840x2160 (23.98/24/25/29.97/30p)	YCbCr 4:2:2 10bit

Input Signal Interfaces	Signal Format (3G_A SDI)	
3G-SDI single link	1920x1080 (50/59.94/60p)	YCbCr 4:2:2 10bit

Input Signal Interfaces	Signal Format (3G_B SDI)	
3G-SDI single link	1920x1080 (50/59.94/60p) (23.98/24/25/29.97/30p) (50/59.94/60i) (25/29.97/30psf)	YCbCr 4:2:2 10bit YCbCr 4:4:4 10/12bit YCbCr 4:2:2 10bit YCbCr 4:2:2 10bit RGB 4:4:4 10/12bit

Input Signal Interfaces	Signal Format (3G_A SDI)	
3G-SDI Quad link(4k)	3840x2160(50/59.94/60p)	YCbCr 4:2:2 10bit
3G-SDI 2-Sample Interleave Quad link(4k)	3840x2160(50/59.94/60p)	YCbCr 4:2:2 10bit

7. Video Support Resolution

VIDEO SUPPORT RESOLUTION

Input Signal Interfaces	Signal Format (HD SDI)	
HD SDI single link	1920x1080 (23.98/24/25/29.97/30p) (50/59.94/60i) (25/29.97/30psf) 1280x720 (50/59.94/60P)	YCbCr 4:2:2 10bit YCbCr 4:2:2 10bit YCbCr 4:2:2 10bit YCbCr 4:2:2 10bit

Input Signal Interfaces	Signal Format (HD-SDI)	
HD-SDI Quad link(4k)	3840x2160 (23.98/24/25/29.97/30p)	YCbCr 4:2:2 10bit
HD-SDI 2-Sample Interleave Quad link(4k)	3840x2160 (23.98/24/25/29.97/30p)	YCbCr 4:2:2 10bit

Input Signal Interfaces	Signal Format (SD SDI)	
SD SDI single link	720x487 (59.94i) 720x576 (50i)	YCbCr 4:2:2 10bit YCbCr 4:2:2 10bit

Input Signal Interfaces	Signal Format (HDMI)	
HDMI Single link	1280x720(50/59.94/60p) 1920x1080(50/59.94/60p) 1920x1080(23.98/24/25 /29.97/30p60i/59.94i/50i)	* HDMI RGB 4:4:4 8bit YCbCr 4:4:4 8bit YCbCr 4:2:2 8bit
	3840x2160 (23.98/24/25/29.97/30p)	RGB 4:4:4 8bit YCbCr 4:4:4 8bit YCbCr 4:2:2 8bit RGB 4:4:4 10bit YCbCr 4:4:4 10bit YCbCr 4:2:2 10bit RGB 4:4:4 12bit YCbCr 4:4:4 12bit YCbCr 4:2:2 12bit
	3840x2160 (50/59.94/60p)	RGB 4:4:4 8,10,12bit YCbCr 4:2:2 8,10,12bit YCbCr 4:2:0 8bit

8. Product Specifications

		LUM-550M
LCD	Size	55"
	Resolution	3840(H) x 2160(V) Pixels, RGBW stripe arrangement
	Pixel Pitch	0.315(H) x 0.315(W) mm
	Color Depth	1.07B colors
	Viewing Angle	H : 178 degrees / V : 178 degrees
	Luminance of white	500 cd/ m ² (Center 1point, Typ.)
	Contrast Ratio	1100:1
	Display Area	1209.6(H) x 680.4(V) mm
Input	1 x HDMI	HDMI V2.0 Input 1Ch
	4 x BNC	12G/3G/HD/SD SDI Input 2Ch 3G/HD/SD SDI Input 2Ch
Output	1 x BNC	12G/3G/HD/SD SDI Output 1Ch By Pass Mode : SDI A/B Channel (Active Through Out) 12G Mode : 3840x2160 60p/59.94p/50p (All Input Format Converted to 12G-SDI)
Input Signal	12G-SDI	12Gb/s
	6G-SDI	6Gb/s
	3G-SDI	2.970Gb/s
	HD-SDI	1.485Gbps
	HDMI	720p/1080p/2160p
SDI Input Signal Formats	SMPTE ST2082-10 Mode1	3840x2160 60p/59.94p/50p (12G-SDI x 1Ch)
	SMPTE ST2081-10 Mode1	3840x2160 30p/29.97p/25p/24p*/23.98p* (6G-SDI x 1Ch)
	SMPTE ST425-5	3840x2160 60p/59.94p/50p (3G-SDI x 4Ch)
	SMPTE ST274	3840x2160 30p/29.97p/25p/24p*/23.98p* (HD-SDI x 4Ch)**
	SMPTE ST425	1920x1080 60p/59.94p/50p (3G-SDI LEVEL A)
		1920x1080 60i/59.94i/50i/30p/29.97p/25p/24p*/23.98p* (3G-SDI LEVEL B)
	SMPTE-274M	1280x720 60p/59.94p/50p (3G-SDI LEVEL B)
		1280x720 60p/59.94p/50p
	SMPTE-259M	720x487 59.94i
		720x576 50i
HDMI Input Signal Formats	V2.0	3840x2160 60p/59.94p/50p (RGB/YCbCr 4:4:4 8bpp Mode)
	V1.4	3840x2160 30p/29.97p/25p/24p*/23.98p* (RGB/YCbCr 4:4:4 8bpp Mode)
	V1.2	1920x1080 60i/59.94i/50i/30p/29.97p/25p/24p*/23.98p* (RGB/YCbCr 4:4:4 8bpp Mode)
		1280x720 60p/59.94p/50p (RGB/YCbCr 4:4:4 8bpp Mode)
		* 24P/23.97P : 60p/59.94p Frame-rate Converted Display
Audio In		SDI Embedded Audio (Group, Ch Selectable)
Audio Out		External Output Port (3.5m Phone Jack)
Power		100~240V, 1.3~0.6A/ 50/60Hz
Power Consumption (Approx.)		150 Watts (Max.)
Operating Temperature		0°C to 40°C (32°F to 104°F)
Storage Temperature		-20°C to 50°C (-4°F to 140°F)
Main Body Dimensions (mm/inch)		1237.8x728.5x70 (48.73x28.68x2.76)
Main Body Dimensions with stand (mm/inch)		1237.8x786.5x309.4 (48.73x31x12.18)
Weight		31Kg / 66.14lbs
Basic Accessories		AC Power cord, Remote Control, Stand
Optional Accessories		

* The specification above may be changed without notice.

8. Product Specifications

		LUM-430M
LCD	Size	43"
	Resolution	3840 horiz. by 2160 vert. Pixels, RGB stripe arrangement
	Pixel Pitch	0.2451 mm x 0.2451 mm
	Color Depth	10bit(D), 1.06 Billion colors
	Viewing Angle	Viewing angle free (R/L 178 (Min.), U/D 178 (Min.))
	Luminance of white	350cd/m2 (Center 1point ,Typ.)
	Contrast Ratio	1,000 : 1
	Display Area	42.51 inches(1,079.75 mm) diagonal
	Response Time	Variation : 6ms / Gray to Gray(BW) : 8ms
Input	1 x HDMI	HDMI V2.0 Input 1Ch
	4 x BNC	12G/3G/HD/SD SDI Input 2Ch 3G/HD/SD SDI Input 2Ch
Output	1 x BNC	12G/3G/HD/SD SDI Output 1Ch By Pass Mode : SDI A/B Channel (Active Through Out) 12G Mode : 3840x2160 60p/59.94p/50p (All Input Format Converted to 12G-SDI)
SDI Input Signal Formats	SMPTE ST2082-10 Mode1	3840x2160 60p/59.94p/50p (12G-SDI x 1Ch)
	SMPTE ST2081-10 Mode1	3840x2160 30p/29.97p/25p/24p*/23.98p* (6G-SDI x 1Ch)
	SMPTE ST425-5	3840x2160 60p/59.94p/50p (3G-SDI x 4Ch)
	SMPTE ST274	3840x2160 30p/29.97p/25p/24p*/23.98p* (HD-SDI x 4Ch)**
	SMPTE ST425	1920x1080 60p/59.94p/50p (3G-SDI LEVEL A) 1920x1080 60i/59.94i/50i/30p/29.97p/25p/24p*/23.98p* (3G-SDI LEVEL B) 1280x720 60p/59.94p/50p (3G-SDI LEVEL B)
	SMPTE-274M	1920x1080 60i/59.94i/50i/30p/29.97p/25p/24p*/23.98p*
	SMPTE-296M	1280x720 60p/59.94p/50p
	SMPTE-259M	720x487 59.94 720x487 59.94
		* 24P/23.97P : 60p/59.94p Frame-rate Converted Display
		** Not support 2 Sample Interleaved Input
HDMI Input Signal Formats	V2.0	3840x2160 60p/59.94p/50p (RGB/YCbCr 4:4:4 8bpp Mode)
	V1.4	3840x2160 30p/29.97p/25p/24p*/23.98p* (RGB/YCbCr 4:4:4 8bpp Mode)
	V1.2	1920x1080 60i/59.94i/50i/30p/29.97p/25p/24p*/23.98p* (RGB/YCbCr 4:4:4 8bpp Mode) 60p/59.94p/50p 1280x720 60p/59.94p/50p (RGB/YCbCr 4:4:4 8bpp Mode)
		* 24P/23.97P : 60p/59.94p Frame-rate Converted Display
Audio In	SDI Embedded Audio (Group, Ch Selectable)	
Audio Out	External Output Port (3.5m Phone Jack)	
Power	100~240V, 50/60Hz	
Power Consumption (Approx.)	TBD	
Operating Temperature	0°C to 40°C (32°F to 104°F)	
Storage Temperature	-20°C to 60°C (-4°F to 140°F)	
Main Body Dimensions (mm/inch)	985 x 587 x 87.4(mm) / 38.77 x 23.11 x 3.44(inch)	
Main Body Dimensions with stand (mm/inch)	985 x 635.6 x 309.4(mm) / 98.77 x 25.02 x 12.18(inch)	
Weight	23.0kg / 50.70(lbs)	
Basic Accessories	AC Power Cable	
Optional Accessories	Carrying Case.	

* The specification above may be changed without notice.



FOR MORE INFORMATION PLEASE VISIT : <http://www.tvlogic.tv>
12F, ACE HIGH-END 8, 84 Gasan-digital 1-ro, Geumcheon-gu, Seoul, 18590, KOREA
TEL : +82-70-8668-6611, FAX : 82-2-6123-3201, E-mail : sales@tvlogic.co.kr