




RS-EZ series | Install Instructions For:
RS42-EZ, RS62-EZ, RS82-EZ, HP82-EZ

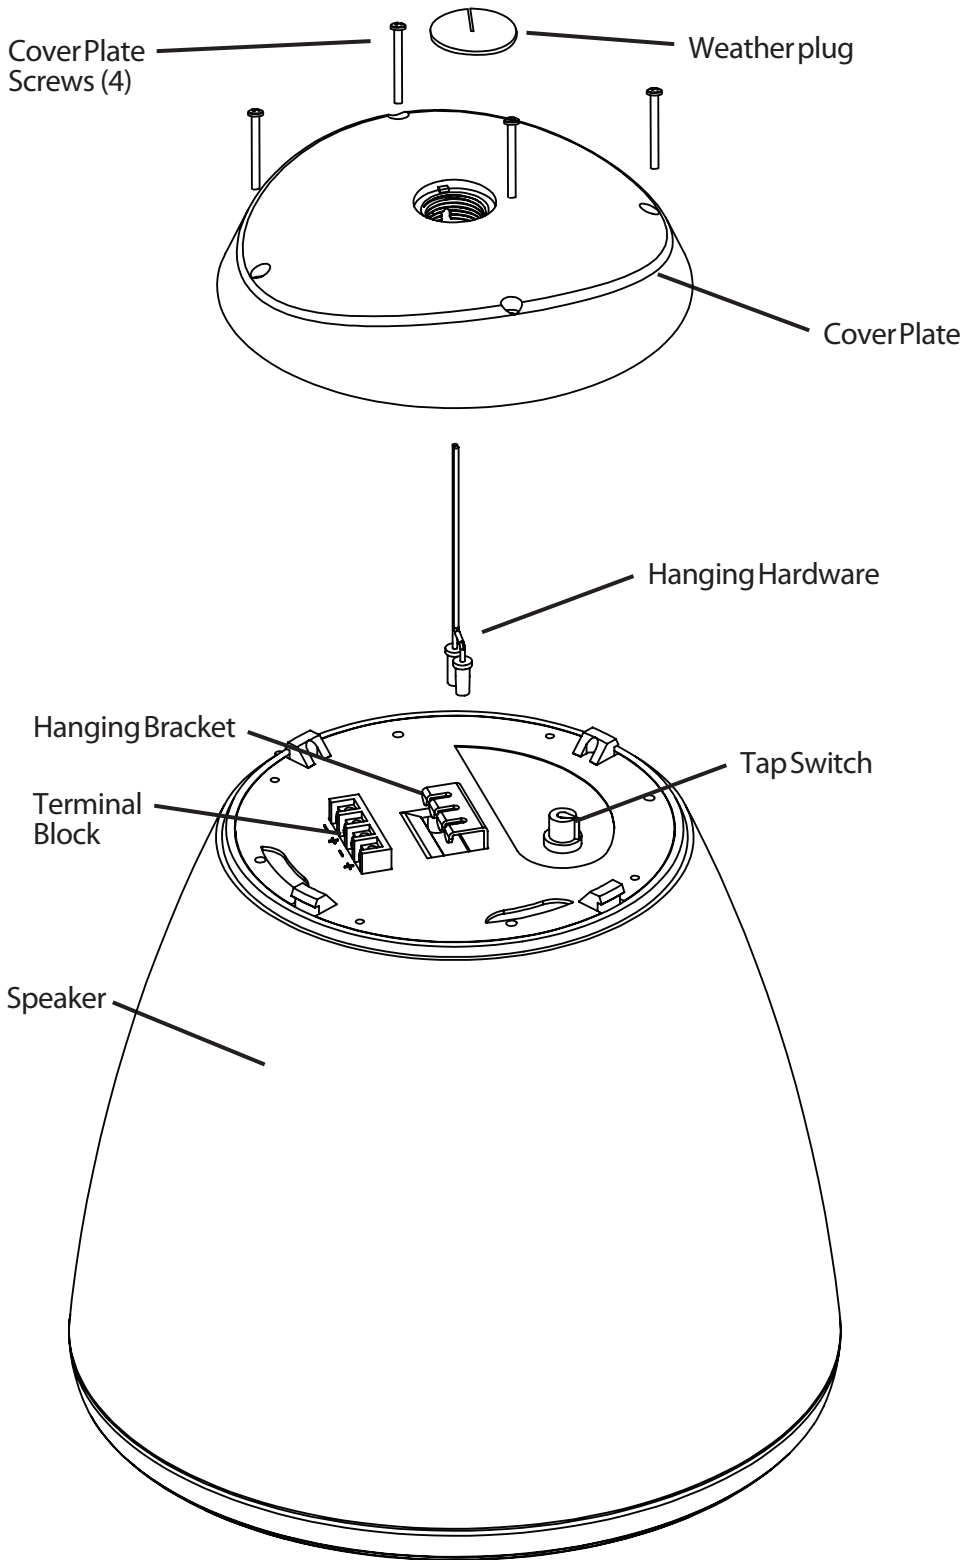

Box contents

- 1 Speaker
- 1 Cover Plate w/ 4 screws
- 1 Rubber weather plug
- 1 Hanging kit

1.435.647.9555 | 800.647.TUBE | www.soundtube.com


©2012 SoundTube Entertainment, Inc. All rights reserved. PNINS-RS-EZ Rev 03.01.12

Warning


SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.

Warning


Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.

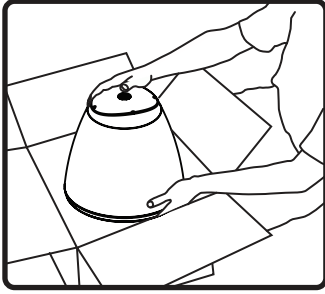


1. Unpack speaker and SpeedClamp™ mounting hardware.

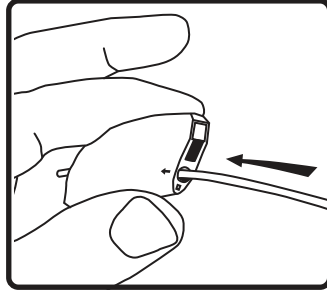


2. Thread hanging or safety cable through SpeedClamp™ mechanisms as shown.

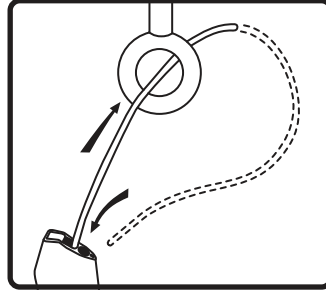


3. Attach the hanging cable by securing it and safety cable to structure as shown.

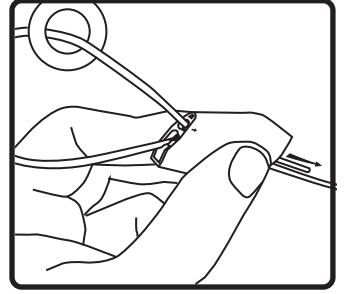


4. Thread cable end(s) through SpeedClamp™ mechanisms as shown.

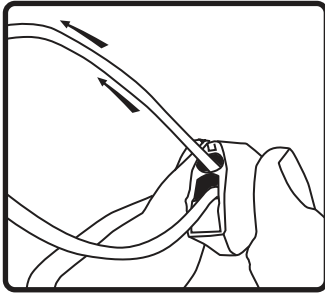


5. Adjust speaker hanging height with SpeedClamp™ mechanism. Pull to tighten & press button on SpeedClamp as shown to loosen or adjust.

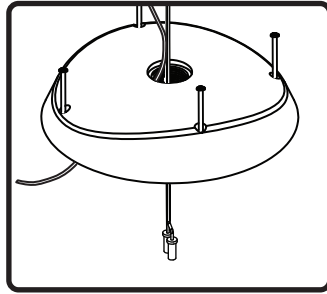


6. Slide cover plate over hanging and safety cables and run signal wire through center hole.

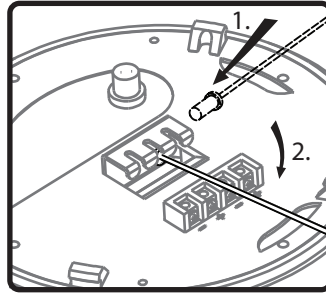


7a. Attach hanging cable by (1) inserting into side of mounting bracket and (2) rotating to align with center slot in hanging bracket.

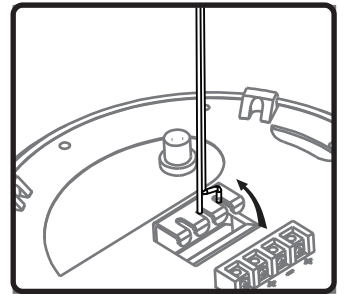


7b. Once aligned with central slot, pull cable up into slot to secure. Repeat steps 7a and 7b with secondary safety cable into one of the side slots.

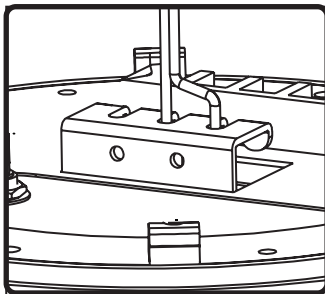


8. Extra slot and 2 holes provided for additional safety cables where needed.

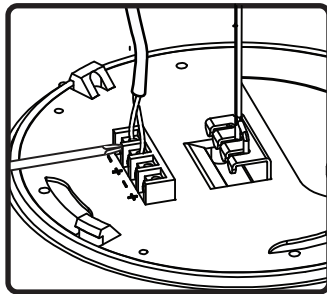


9. Connect signal wires to (+) and (-) inputs. Use extra (+) and (-) for daisy chaining.

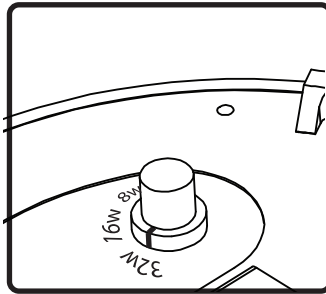


10. Select desired tap position. Switch is preset to maximum 70.7V (100V) mode.

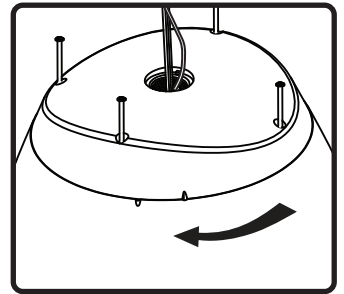


11. Place cover plate onto top of speaker and rotate clockwise until alignment indicators meet.

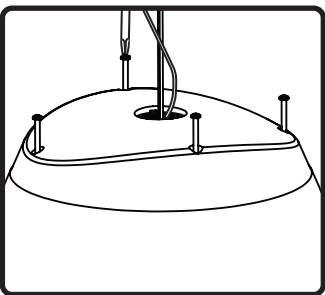

12. Tighten all four (4) screws to lock cover plate in place.

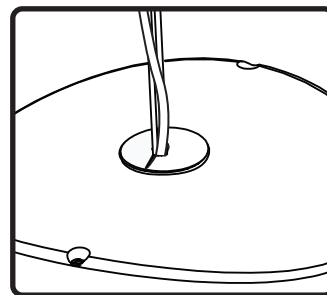


13. Install rubber weather plug by sliding slit over the wire, then pressing snugly into hole in cover plate.




14. Done.


Conduit Installation:




1. Unpack speaker from box.

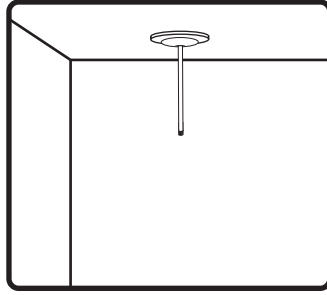


2. Securely mount conduit to structure. Conduit must have 3/4" NPT thread to accommodate RS-EZ speaker.

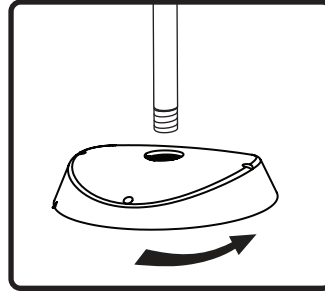


3. Thread cover plate on to conduit until secure.

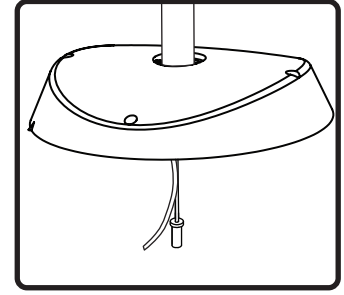


4. Run signal wire and at least one safety cable through conduit.

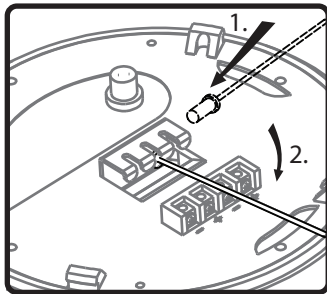


5. Attach safety cable by first inserting into side of mounting bracket.

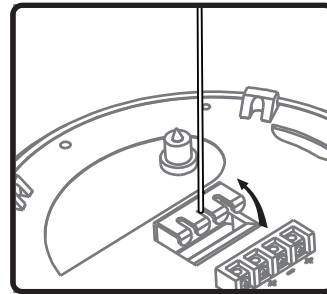


6. Align safety cable with center slot and pull up to secure.

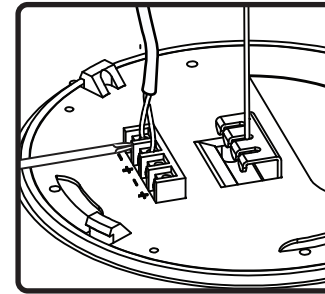


7. Connect signal wires to (+) and (-) inputs. Use extra (+) and (-) for daisy chaining.

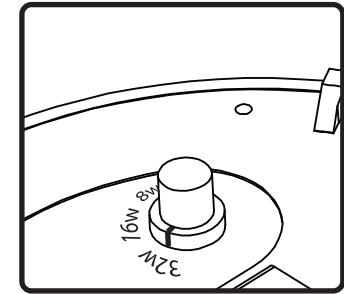


8. Select desired tap position. Switch is preset to maximum 70.7V (100V) mode.

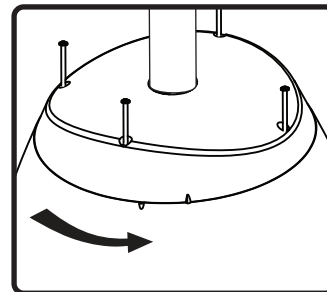

9. Line speaker up with cover plate and rotate to lock in to place. Alignment marks will meet when secured.

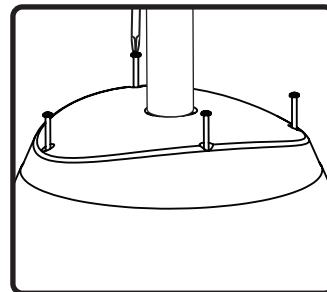

10. Tighten all four (4) screws to lock speaker in to cover plate.



11. Done.