


# Ex

## Event Master expansion unit

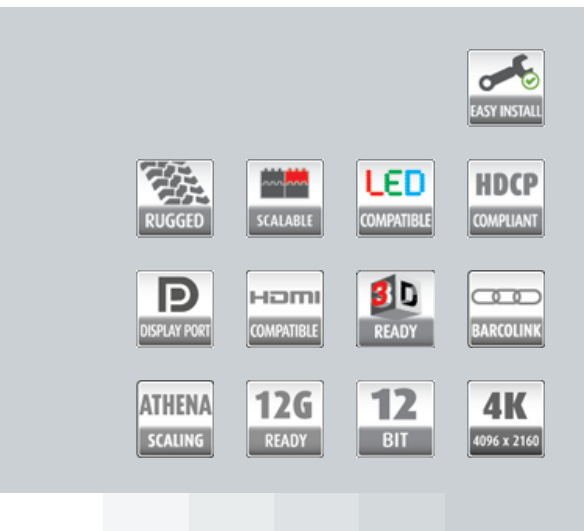

- Add extra scaling/switching power to your system
- Simplified cabling and system setup
- Invest only when you need to

By linking the Ex with other Event Master processors (E2 or S3-4K) you add input and output capacity, expanding the scaling and switching power of the entire system.

### Affordable scaler

Event Master Ex is an affordable 4K60p scaler with the same processing power as four ImagePROs. A single processor can provide a 4x4 scaling matrix of HD sources or link two processors to create an 8x8 scaling matrix.

### Expand your Event Master system

Expanding the input and output capacity of your Event Master processors, the Ex adds more scaling and switching power to your system. It extends I/Os for applications up to 100 meters away.

### Flexible and simple

The Ex shares its modular I/O cards and software with the other Event Master products. This allows you to flexibly configure your systems and service your units in the field. It also makes your cabling and systems simpler. It replaces up to eight fiber extenders between I/O devices and Event Master boxes. Now you only need one cable and an Ex. Two Ex processors with a total of two input cards and two output cards can be connected to each E2 or S3-4K link connection providing 8 Ex chassis for the E2 and 4 Ex chassis for the S3-4K. This enables 8 inputs and 8 outputs per link connection, totaling 32 inputs and outputs for E2 and 16 inputs and outputs for the S3-4K - all without adding another full-sized processing chassis.

## PRODUCT SPECIFICATIONS

## EX

Video inputs	Two card slots which can be either input or output <ul style="list-style-type: none"><li>Up to 8 inputs using any of the Event Master input cards</li><li>Inputs can be distributed to other processors via the link cable or to a locally installed output card</li></ul>
Video outputs	Two card slots which can be either input or output <ul style="list-style-type: none"><li>Up to 8 outputs using any of the Event Master output cards</li><li>Sources for the outputs can be from remote systems via the link connection or from a locally installed input card.</li></ul>
Genlock	Analog reference input on BNC connectors; Blackburst and Bi-level at SD, and Tri-level at HD Reference output is provided by an internal sync generator capable of Bi-level and Tri-level sync signals
Program output	Up to 8 program outputs for destinations created in a linked E2 or S3-4K processor.
Scaled Aux outputs	User definable up to 8 x 2048x1200@60 or 2 x 4K@60
Mixers	N/A
Still stores	Up to 100 HD stills available in Aux
Layer effects	N/A
Multiviewer	Ex inputs and outputs can be viewed in the host E2 or S3-4K processor Multiviewer, just as if the inputs and AUX outputs resided in the host processor.
Expandability	<ul style="list-style-type: none"><li>Easily expandable for larger display applications via proprietary links</li><li>Link units to increase available inputs and outputs for larger tiled/blended widescreen applications</li><li>Two Ex chassis can be linked for standalone operation</li><li>S3-4K supports up to 4 Ex chassis linked (16 inputs and 16 outputs of HD video)</li><li>E2 supports up to 8 Ex chassis linked. (32 inputs and 32 outputs of HD video)</li></ul>
HDCP	HDCP compliant
Control	<ul style="list-style-type: none"><li>Event Master screen management software for PC or MAC</li><li>Ethernet RJ-45, 1000/100/10 Mbps autosense</li></ul>
Serviceability	Field-Serviceable I/O cards (not hot-swappable)
Dimensions	<ul style="list-style-type: none"><li>Height: 4.37 cm (1.72 in)</li><li>Width: 48.26 cm (19 in)</li><li>Depth: 40.41 cm (15.91 in)</li></ul>
Weight	5.53 kg / 12.2 lbs
Power	Input power: 100-240 VAC 50/60Hz 125W
Environmental temperature	0-40° C / 32-104 F
Environmental humidity	0-95% non-condensing
Warranty	3 years parts and labor

Last updated: 20 Jun 2017

Technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest information.