




NILES®



# MSU250

## INFRARED EXTENDER SYSTEMS

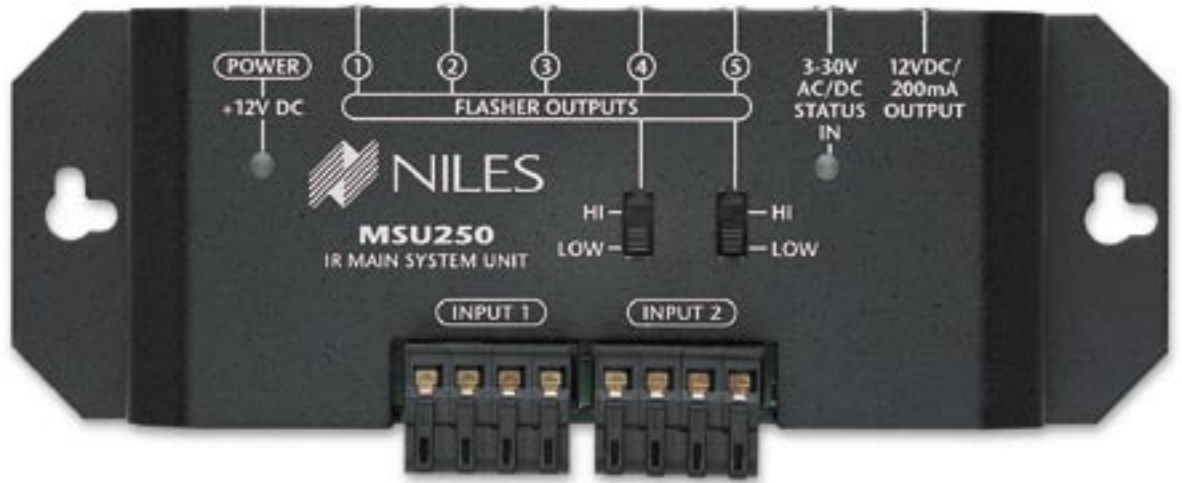

### IR Repeater System for Single Zone Applications

- Two sensor inputs with five flasher outputs
- Packaged for retail display

SPECIFICATIONS SHEET

## SPECIFICATIONS

### IR Repeater System for Single Zone Applications

MSU250

Stock Number

FG01003



### Features

- Two sensor inputs with removable screwless connectors
- Use with IRH610 (FG01018 to provide additional inputs)
- Five flasher outputs with 3.5mm flasher output jacks including: two switchable high/low flasher jacks for driving IRB1 flooding flashers or MicroFlashers®
- Low profile, small footprint for unobtrusive installation
- Integrated mounting wings accommodate both vertical and horizontal installation
- UL-listed regulated in-line power supply with universal voltage capability
- 12 Volt DC status input jack
- 3.5mm 12 Volt output jack triggered by the presence of status or discrete IR commands


### Specifications

- Dimensions: 5-5/8" wide x 1-1/4" high x 2" deep  
14.29 cm wide x 3.18 cm high x 5.08 cm deep

**Warranty: Two-year limited**

**Shipping weight: 2 lbs.**

## A CCESSORIES

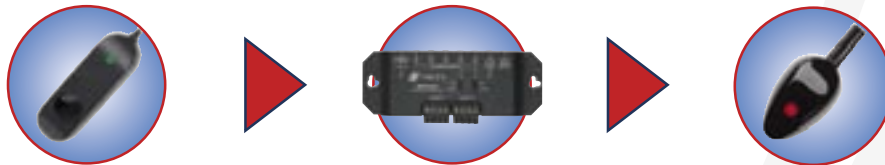

The **MSU250** is one of three elements needed to form a complete remote control extender system. Elements of a remote control extender system:

- ① **Infrared Sensor/Keypad** receives/initiates the commands and routes them to the Infrared Main System Unit.
- ② **Infrared Main System Unit** amplifies and distributes the commands to the Infrared Flashers.
- ③ **Infrared Flashers** transmit the commands to the A/V components