

Indoor Proximity Card Reader

PR-312S-PQ

The **ENFORCER®** Indoor Proximity Card Reader is a flexible solution for securing controlled access. Its stylish case and small size make it ideal for use in most residential, commercial, and industrial sites. Simple enough to deploy in small businesses, it also has the programming capability to meet the needs of midsize and enterprise companies. Simple installation, high reliability, attractive design, and scalability are all combined in the **ENFORCER®** Indoor Proximity Card Reader.

Features:


- Stand-alone operation
- Up to 500 user cards
- Up to 5 super user cards, plus 1 master card
- 10 Cards included (additional cards and keyfobs available, sold separately in packs of 10)
- Output relay for either time (1~60 s) or toggle
- Status LEDs for operations and programming
- Solid-state lock relay for longer life, lower power consumption, and shock/vibration resistance



Specifications:

Model	PR-312S-PQ	
Power input	12VDC	
Current draw	Standby	60mA
	Active	80mA
Max. read distance	6" (15cm)	
User card limit	500 Cards (5 groups @ 100 users)	
Super user card limit	5 cards	
Master card limit	1 card	
Transmit frequency	125kHz (EM125)	
Outputs	Lock strike relay	Fail-safe/fail-secure, 3A@16VDC (solid-state relay)
	Doorbell relay	N.O. Dry contact, 1A@24VDC
	Tamper switch	N.C. Dry contact, 50mA@16VDC
Relay time delay	Timed output 1~60 s or toggle mode	
Temperature	-4°~158° F (-20°~70° C)	
Relative humidity	5~95%, non-condensing	
IP Rating	IP55	
Dimensions	4 3/4" x 2 3/8" x 1 5/16" (120x60x23 mm)	

Dimensions and Overview:

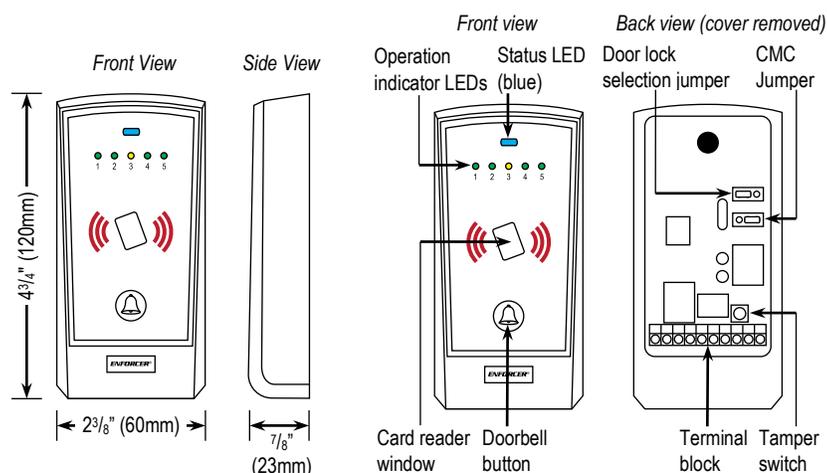

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com




Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiPR-312S-PQ_141014.docx


Indoor Proximity Card Reader

Sample Application:

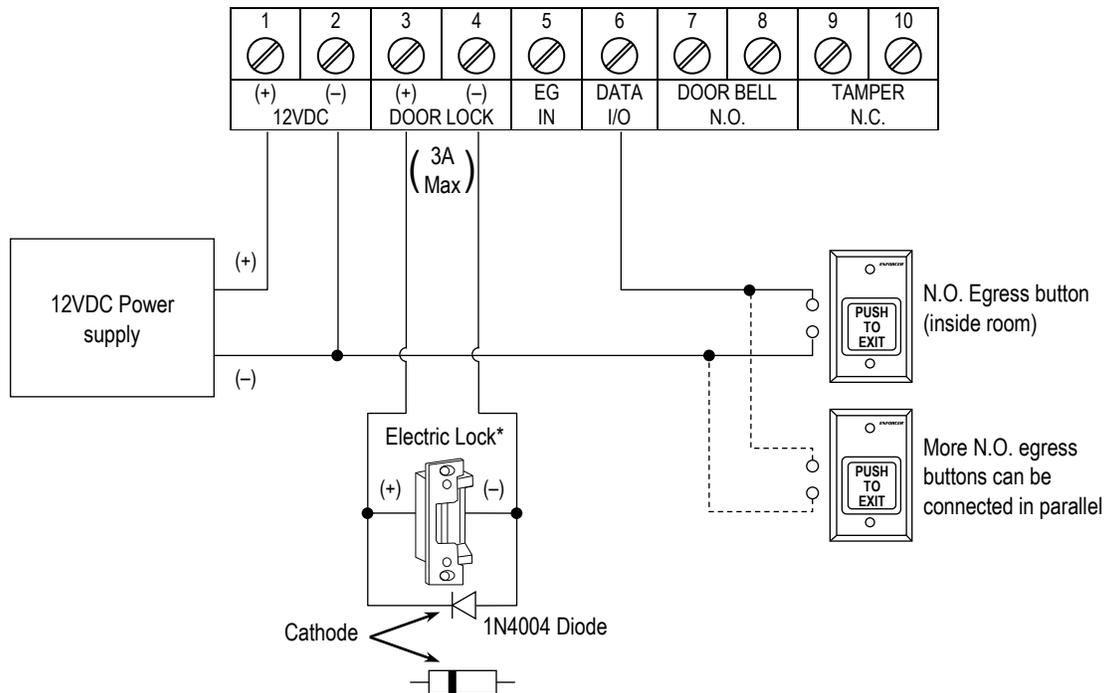

LED Indicators:

1. Status indicator (blue LED) – a steady ON during normal operation, or flashes while the proximity card reader is in the programming mode or in the lock-down mode.
2. Operation indicators (LEDs numbered 1~5) – show the status of the proximity card reader while in the operation mode or in the programming mode.
 - While the proximity card reader is in the operation mode and it reads a programmed card, the LED corresponding to that card's user group turns to a steady ON.
 - While the proximity card reader is in the programming mode, the LEDs show the status of the feature settings.

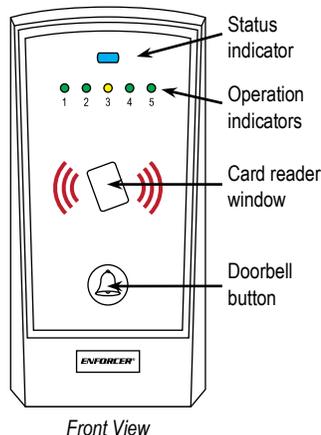

Also Available from SECO-LARM®:

PR-K1S1-A
Proximity cards (EM125)
(packs of 10)



PR-K1K1-AQ
Proximity keyfobs (EM125)
(packs of 10)



SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com