



BD-1

Application	Kick drum
Capsule Type	Dynamic
Sensitivity	-55 dB (1V/Pa)
Frequency Response	50 Hz to 15 kHz
Polar Pattern	Uni-directional
Output impedance	400Ω

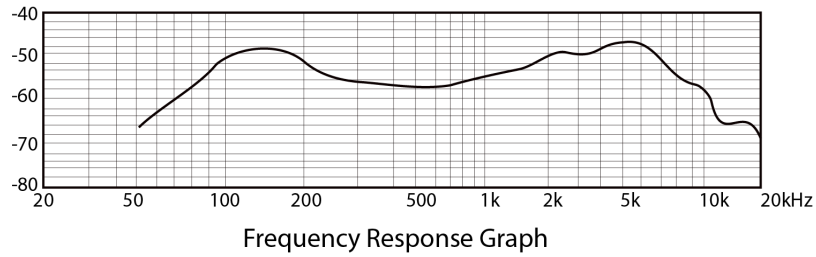


ST-4

Application	Snare drum, toms
Capsule Type	Dynamic
Sensitivity	-56 dB (1V/Pa)
Frequency Response	50 Hz to 14 kHz
Polar Pattern	Uni-directional
Output Impedance	350Ω

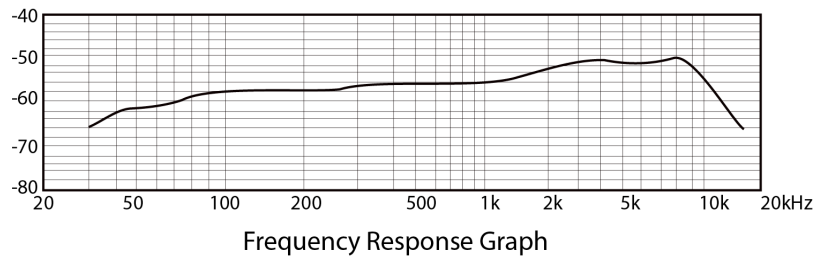

OH-2

Application	Overheads
Element	Ø16mm small-diaphragm condenser
Sensitivity	-38dB (1V/Pa)
Frequency Response	30 Hz to 18 kHz
Polar Pattern	Uni-directional
Output Impedance	100Ω
Maximum Input	135 dB
S/N Ratio	74 dB
Power Requirement	9V-52V Phantom Power

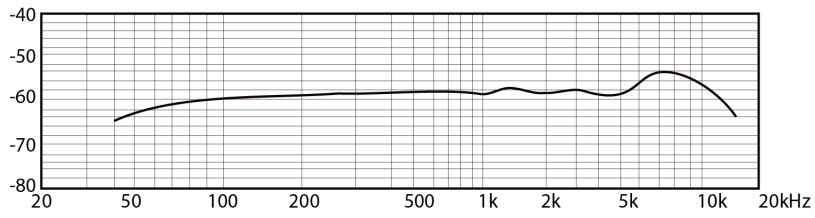

Frequency Response Graph

