

S-32P *Coming Soon*

32" FHD Studio Wall Monitor with SFP Module & Ember+ Protocol



Size	31.5"
Resolution	1920 x 1080 (16:9)
Pixel Pitch	0.121(H) x 0.363(W) mm
Color Depth	16.7M
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	400 cd/m ²
Contrast Ratio	1200:1
Display Area	698.4(H) x 392.85(V) mm

Input	
2 x BNC	SDI Input
1 x DVI - D	DVI Input
2 x SFP	In/Out (combined)
1 x HDMI	HDMI Input

Output	
2 x BNC	SDI Output


Input Signal	
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
DVI	VESA/IBM Modes
HDMI	1080p(60/59.94/50/30/25/24/23.98)/ 1080i(60/59.94/50)/720p(60/50)/ 480i(60)/480p(60)/576i(50)/576p(50)

SDI Input Signal Formats	
SMPTE-2048	2048x1080p(24/24sF/23.98/23.98sF)
SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/ 30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i(60/59.94/50)
	1080p(30/29.97/25/24/24sF/23.98/23.85sF)
SMPTE-296M	720p(60/59.94/50)
SMPTE-125M	480i(59.94)
ITU-R BT.656	576i(50)
Audio IN	Embedded Audio Analog stereo (Phone Jack)
Power	AC 100 ~240V (50~60Hz)
Power Consumption (Approx.)	TBD
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Basic Accessory	AC Power Cord / Remote Control / USB Cover / Stand



Main Body Dimensions

Main Body 733.4 x 453 x 84.7(mm) / 28.87 x 17.83 x 3.33(inch)
With Stand 733.4 x 501.5 x 309.77(mm) / 28.87 x 19.74 x 12.19(inch)
Weight 13.56kg / 29.89lbs

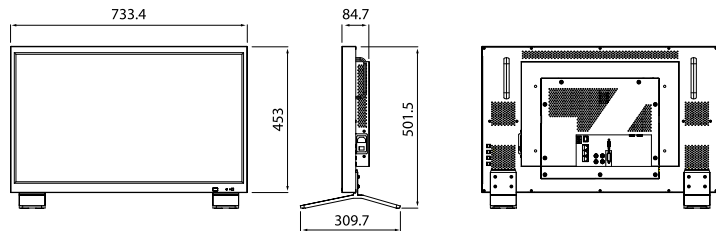

Product Highlights

- 31.5", Full HD Resolution (1920x1080)
- HDR Emulation (PQ, HLG, SLog3)
- Ember+ Protocol (LAWO)
- TSL 3.1/5.0 Support
- Selectable Output via Internal Routing
- 2 x SFP In/Out
- Auto-Calibration (TBD)
- Fast Mode
- Custom 3D-LUT Import (via USB)
- Closed Caption(CC-608/708, CC-KOR)
- Waveform / Vectorscope (High Resolution)
- PBP(Picture By Picture)
- Audio Level Meter
- Time Code Display
- UMD
- User Aspect
- Various Scan Modes

Optional Accessories

