

## IFP-7503 75-INCH 4K INTERACTIVE FLAT PANEL DISPLAY
















## **FEATURES**


- 4K UHD 3840 x 2160 resolution
- IPS Panel technology offers high color accuracy and wide viewing angles
- Incorporates IR touch technology
- · 20-point simultaneous multi-touch capability
- · Two styluses for simultaneous annotation with two colors
- Android OS 9.0 platform
- Windows 11 ready plug and play support for Windows 7/8/10/11
- User-friendly Meetboard Whiteboard App for collaborative meetings
- The Screen-sharing App for multi-display control and wireless mirroring
- View, edit & create office documents with WPS Office Suite App
- Files sharing via email, QR Code, Cloud Drives, Samba and FTP portals
- A USB Type-C port for digital signal, data and 65W power delivery
- Built-in speakers and audio mini-jack in/out connections
- Wall mounts and the Wi-Fi module are included for quick installation
- An optional FMC-06 mobile cart allows easy movement and accessory assembly

Meetboard IFP-Series interactive display offers a future-proof all-in-one collaborative hub for various settings, such as classrooms, meeting rooms and coworking spaces. Built on the Android OS platform, Meetboard is ideal for getting meetings and presentations going right away, without the need for additional devices or software. Present, brainstorming and taking notes cannot be more effortless on Meetboard, bringing a neat and organized space.

## TECHNICAL DRAWING

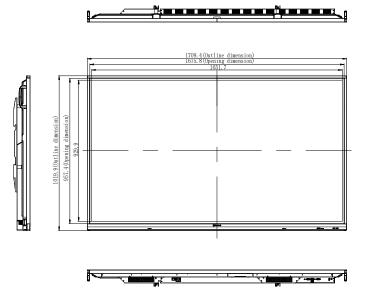







## **SPECIFICATIONS**

Panel
-------

Panel Type LED-Backlit TFT LCD (IPS Technology) Panel Size UHD 3840 x 2160 Max. Resolution Pixel Pitch 0.430 mm Brightness 350 cd/m<sup>2</sup> Contrast Ratio 1200:1 Viewing Angle (H/V) 178°/178° Display Colour 1.07B Response Time

Haze 25%, 2H, Anti-glare treatment Surface Treatment

5 ms

Frequency

Frequency (H) 30 kHz-80 kHz Frequency (V) 50 Hz-76 Hz

Signal Input

HDMI 2.0 x 3 VGA 15-Pin D-Sub x 1

Signal Output HDMI

2.0 x 1

External Control

RS232 In 9-Pin D-Sub LAN RJ45 x 2

Embedded Player

OS Android 9.0 CPU Dual core A73 Memory 4G Storage 32G

Other Connectivity

USB 2.0 x 1 / 3.0 x 4 / Type-C (DP 1.4 / Data 3.0 / PD:65W)

OPS Slot Yes

Audio

Audio In Stereo Audio Jack (3.5 mm) Audio Out Stereo Audio Jack (3.5 mm), S/PDIF

Internal Speakers 16W x 2

Touch Screen

Technology Infrared Touch Frame Positional Accuracy ±1.0 mm

USB 2.0 x 2 (Type-B) Panel Interface

Windows 2000/XP/Vista/CE 6.0 macOS Single Touch Plug & Play Windows 7/8/10/11 Android/Linux (kernel version 3.5+) Chrome OS (39 or above)

Multi-touch Plug & Play macOS (supported by UPDD driver) Multi-touch Support by Driver

Power

Power Requirements AC 100-240V, 50/60 Hz

On Mode 230W Standby Mode < 0.5W Off Mode ΟW Power Supply Internal

Glass

Thickness 3.2 mm (0.13") Transmission Rate ≥ 88% Hardness ≥ 8H Gloss 75±5 GU

**Operating Conditions** 

Temperature 0°C-40°C (32°F-104°F) Humidity 10%-90% (non-condensing)

Storage Conditions

-20°C-60°C (-4°F-140°F) Temperature 10%-90% (non-condensing)

Humidity Mounting

VESA FPMPMI Yes (800 x 400 mm)

Dimensions

Product with Bracket (W x H x D) 1709.4 x 1019.9 x 107.7 mm (67.3" x40.2" x4.2") Product w/o Bracket (W x H x D) 1709.4 x 1019.9 x 85.7 mm (67.3" x40.2" x3.4") 1863.0 x 1140.0 x 225.0 mm (73.4" x44.9" x8.9")

49.9 kg (110.0 lb)

66.8 kg (147.3 lb)

Weight

Packaging (W x H x D) Product w/o Base 48.4 kg (106.7 lb)

Product with Base Packaging

Regulation Approval CE, LVD, WEEE, RoHS, REACH, UKCA, EAC, FCC, BSMI, ICES-003 (Issue 7) Certifications & Compliance

Accessories

Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Supplied

Wall Mount, Wi-Fi / Bluetooth Module

**Optional Accessories** 

Wall Mount (Landscape only) LMK-03

FMC-03+I MK-04, FMC-04+I MK-04, FMC-05B, FWI -01B, FMC-06 Floor Mount (Landscape only)















