

## IFP-8603 86-INCH 4K INTERACTIVE FLAT PANEL DISPLAY
















## **FEATURES**

- 4K UHD 3840 x 2160 resolution
- IPS Panel technology offers high color accuracy and wide viewing angles
- Incorporates IR touch technology
- · 20-point simultaneous multi-touch capability
- · Two styluses for simultaneous annotation with two colors
- Android OS 9.0 platform
- Windows 11 ready plug and play support for Windows 7/8/10/11
- User-friendly Meetboard Whiteboard App for collaborative meetings
- The Screen-sharing App for multi-display control and wireless mirroring
- View, edit & create office documents with WPS Office Suite App
- Files sharing via email, QR Code, Cloud Drives, Samba and FTP portals
- A USB Type-C port for digital signal, data and 65W power delivery
- Built-in speakers and audio mini-jack in/out connections
- Wall mounts and the Wi-Fi module are included for quick installation
- An optional FMC-06 mobile cart allows easy movement and accessory assembly

Meetboard IFP-Series interactive display offers a future-proof all-in-one collaborative hub for various settings, such as classrooms, meeting rooms and coworking spaces. Built on the Android OS platform, Meetboard is ideal for getting meetings and presentations going right away, without the need for additional devices or software. Present, brainstorming and taking notes cannot be more effortless on Meetboard, bringing a neat and organized space.

## TECHNICAL DRAWING

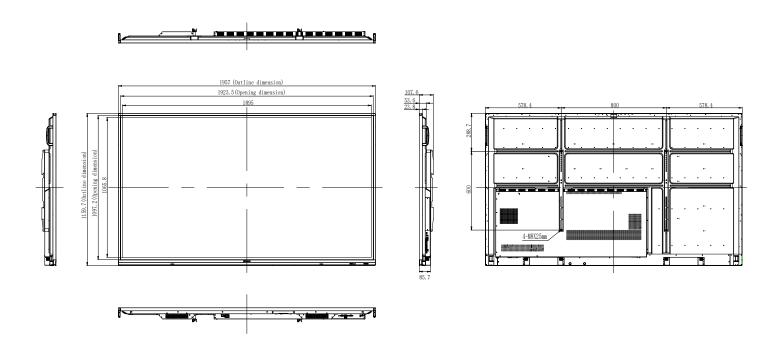



## **SPECIFICATIONS**

	٥.		_
г	-a	ш	c

Panel Type LED-Backlit TFT LCD (IPS Technology) Panel Size Max. Resolution UHD 3840 x 2160 Pixel Pitch 0.494 mm 350 cd/m<sup>2</sup> Brightness Contrast Ratio 1200 : 1 Viewing Angle (H/V) 178°/178° 1.07B Display Colour Response Time 5 ms Haze 28%, 2H, Anti-glare treatment Surface Treatment Frequency

Frequency (H) 30 kHz-80 kHz Frequency (V) 50 Hz-76 Hz

Signal Input

Power

HDMI 2.0 x 3 VGA 15-Pin D-Sub x 1

Signal Output HDMI 2.0 x 1

**External Control** 

RS232 In 9-Pin D-Sub LAN RJ45 x 2

**Embedded Player** 

OS Android 9.0 CPU Dual core A73 Memory 4G Storage

Other Connectivity USB

2.0 x 1 / 3.0 x 4 / Type-C (DP 1.4 / Data 3.0 / PD:65W)

OPS Slot Audio

Audio In Stereo Audio Jack (3.5 mm) Audio Out Stereo Audio Jack (3.5 mm), S/PDIF

Internal Speakers 16W x 2

**Touch Screen** Infrared Touch Frame Technology Positional Accuracy ±1.0 mm USB 2.0 x 2 (Type-B) Panel Interface

Single Touch Plug & Play Windows 2000/XP/Vista/CE 6.0 macOS

Multi-touch Plug & Play Windows 7/8/10/11 Android/Linux (kernel version 3.5+) Chrome OS (39 or above)

Multi-touch Support by Driver macOS (supported by UPDD driver)

Power Requirements AC 100-240V, 50/60 Hz

315W On Mode < 0.5W Standby Mode Off Mode ΟW Power Supply Internal Glass

Thickness 3.2 mm (0.13") Transmission Rate ≥ 88% Hardness ≥ 8H Gloss 75±5 GU

**Operating Conditions** Temperature 0°C-40°C (32°F-104°F)

Humidity 10%-90% (non-condensing)

Storage Conditions

Temperature -20°C-60°C (-4°F-140°F) Humidity 10%-90% (non-condensing)

Mounting VESA FPMPMI Yes (800 x 600 mm)

Dimensions

Product with Bracket (W x H x D) 1957.0 x 1159.7 x 107.6 mm (77.1" x45.7" x4.2") Product w/o Bracket (W x H x D) 1957.0 x 1159.7 x 85.7 mm (77.1" x45.7" x3.4") Packaging (W x H x D) 2110.0 x 1283.0 x 225.0 mm (83.1" x50.5" x8.9")

Weight Product w/o Base 62.0 kg (136.7 lb) Product with Base 63.5 kg (140.0 lb) Packaging 82.0 kg (180.8 lb)

Regulation Approval CE, LVD, WEEE, RoHS, REACH, UKCA, EAC, FCC, BSMI, ICES-003 (Issue 7) Certifications & Compliance

Accessories

Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Supplied Wall Mount, Wi-Fi / Bluetooth Module

Optional Accessories

FMC-03+LMK-04, FMC-04+LMK-04, FMC-05B, FWL-01B, FMC-06 Floor Mount (Landscape only)

















All specifications are subject to change without prior notice. Copyright © 2022 AG Neovo. All rights reserved. The name AG Neovo is a trademark of AIC. All other trademarks are the property of their respective owners. P/C: IF8630 Version 1.0, 20220316