



### VZ-PVM-I4W3N ADVANTAGES

- 32" Mega Pixel IP Full HD 1080p Resolution
- Onvif Profile S Compliant
- Protective Glass / IPS Panel for Wider Viewing Angle - 178° / 178°
- Camera Motion Sensor & Time Interval Based Source Switching
- Auto Power / Source Recovery
- Built-in 2 Mega Pixel Camera / 600 TV Line - Analog Video Resolution
- PIP / PBP
- BNC(NTSC/PAL), VGA, HDMI, RJ-45, Audio, DC 12V Out
- 3D Comb-filter, De-interlace
- "A" Commercial Grade LED
- Supports Dual Voltage (110V AC and 24V DC)
- 3-Year Warranty




MODEL #		VZ-PVM-I4W3N
<b>DISPLAY</b>		
Screen Size	32"	
Max. Resolution	1920 x 1080 @60Hz	
Pixel Pitch	0.36375mm x 0.36375mm	
Brightness	300cd/m <sup>2</sup> (Typical)	
Contrast Ratio	1200:1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	178° / 178°	
Display Color	16.7 Million	
Response Time	< 8 ms	
Video System	NTSC / PAL	
Frequency (H) / Frequency (V)	30 ~ 84kHz / 50 ~ 75Hz	
<b>INTERFACE</b>		
AV (Composite) In	1	
Camera (CVBS) Out	1	
HDMI In / VGA In (15Pin D-Sub)	1 / 1	
Audio In / Out	1 / 1	
Ethernet 10 / 100	1	
DC12V Out (Camera Use)	1	
<b>SPECIAL FEATURES</b>		
Multi Display Function	PIP / PBP	
Filter Type	3D Comb-filter / De-Interlace	
Analog Video Resolution (MAX)	600 TV Line	
Multi-lingual Language	English, Spanish, French, Russian, Portuguese	
<b>AUDIO</b>		
Built in Speaker	5W x 2	
<b>DIMENSIONS &amp; WEIGHT</b>		
Outline Dimension (W x H x D)	28.86" x 20.01" x 2.17" 733.2mm x 508.3mm x 55.3mm	
Net Weight / Gross Weight	33.06 lbs ( 15.00 kg ) / 39.68 lbs ( 18.0 kg )	
<b>MOUNT</b>		
VESA	200mm x 200mm / M6 x L8 Screws	
<b>GENERAL</b>		
Transmitter - IR Remote Control	YES	
Power	Electrical Ratings	AC 110~240V (50/60Hz)   24V DC / 4A
	Consumption	≤ 50 W
Warranty	Parts / Labor	3 Year / 3 Year
	MTBF (Approx.)	50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C	
Regulation	cUL, FCC(A), CE	
Compatible Mounts	Wall	VZ-WM50, VZ-AM02
	Ceiling	VZ-CMKIT-01, VZ-CMKIT-02

CAMERA	
Camera Type	2 Mega Pixel IP Camera
Image Sensor / Encoder Chipset	SONY IMX322 / Amba S233
Lens	DC Auto Iris 2.8~12mm Vari-focal Lens
Total / Effect Pixel	1920(H) x 1080p(V) 30fps
Video Compression	H.264, MJPEG, CBR, VBR support
Video Out	1ch CVBS (NTSC/PAL) / 1ch RJ-45 output
Motion Detection	Support
Ethernet Port	10 / 100 Base-T
Web Application	IE 6 ~ 11, Firefox
Network Protocol	TCP/IP, UDP, SMTP, HTTP, FTP, PPPOE DHCP, DNS, DDNS, UPNP, RTP, RTSP
Integration Protocol	ONVIF 2.4 (supported)
Function	2D/3D NR, D-ZOOM, DPC, HLC/BLC, Defog D/N, WDR, AGC, AWB
<b>MEDIA CARD ( Optional )</b>	
External Storage	Support SD/SDHC CARD, USB 2.0 HOST
Output	VIDEO - HDMI(1080p) / AUDIO - L/R, HDMI
VIDEO Format	RM, RMVB, AVI, DVIX, MKV, MOV, HDMOV, MP4, M4V, PMP, AVC, FLV, VOB, MPG, DAT, MPEG, TS, TP, M2TS, WMV, H.264, H.263, WMV9, VC-1, MPEG1/2/4
VIDEO Resolution	1080P @60Hz
AUDIO Format	MPEG1/2/4, MP3, WMA, OGG, AAC, FLAC, APE, AC-3, DTS, ATRA, WAV, PCM
Image Format	JPEG, TIF, PNG, BMP
VIDEO Play Control	AUTO, REPEAT, ZOOM, RESUME, TIME


### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

### DIMENSIONS

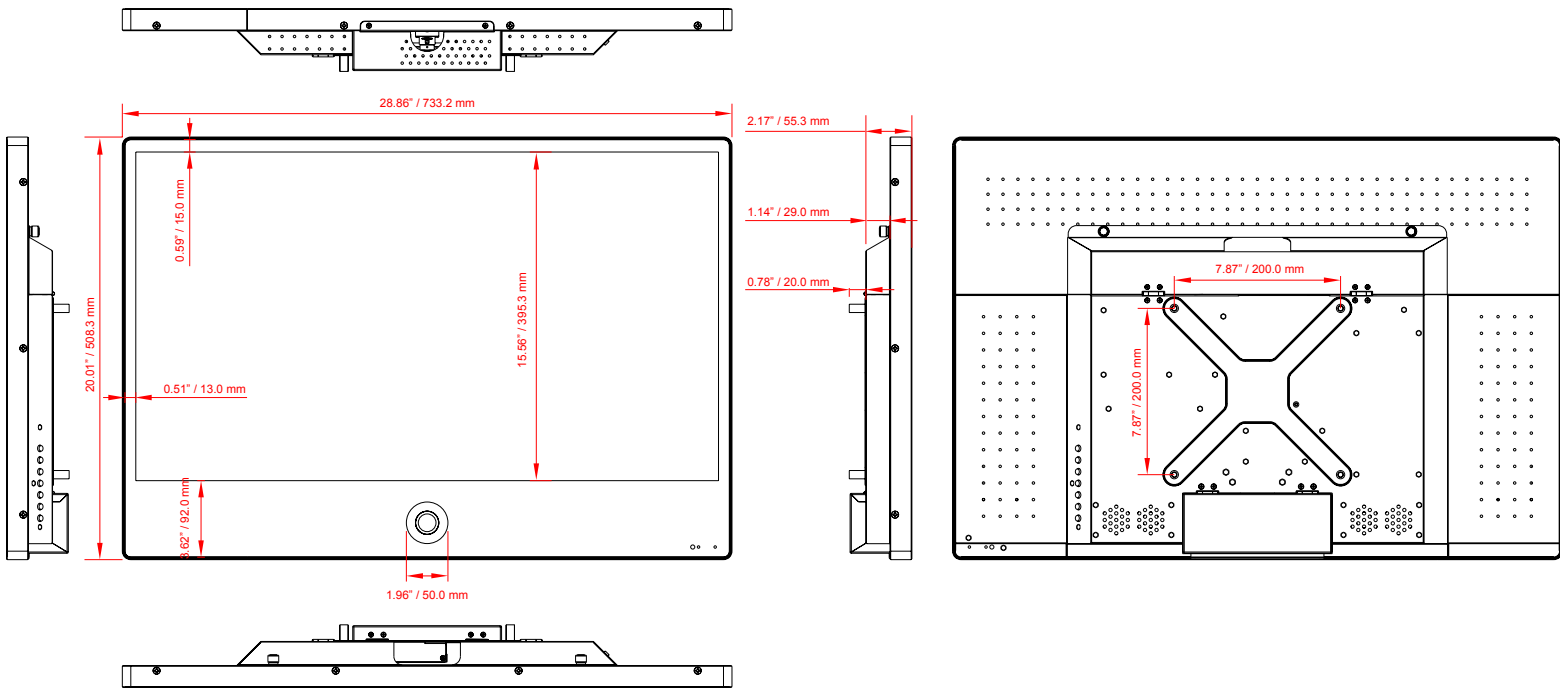

### INTERFACE



1. HDMI IN
2. AV ( BNC ) IN
3. VGA (15 Pin D-Sub) IN
4. AUDIO IN / OUT
5. CAMERA CVBS OUT
6. CAMERA IP(Ethernet) OUT
7. (Optional) Media Player HDMI OUT
8. (Optional) Media Player USB
9. (Optional) Media Player SD Card
10. AC 110V IN
11. DC 24V IN
12. DC 12V OUT

### Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.