

FC-69 HDMI Audio Embedder/De-embedder Quick Start Guide


This guide helps you install and use your product for the first time. For more detailed information, go to http://www.kramerav.com/manual/FC-69 to download the latest manual or scan the QR code on the left.

Step 1: Check what's in the box



FC-69 HDMI Audio Embedder/De-Embedder

1 Power supply (5V DC)







Step 2: Install the Device

Attach the rubber feet and place on a table or mount the FC-69 in a rack (using an optional RK-3T rack adapter).

Step 3: Connect the inputs and outputs


Always switch off the power on each device before connecting it to your FC-69.

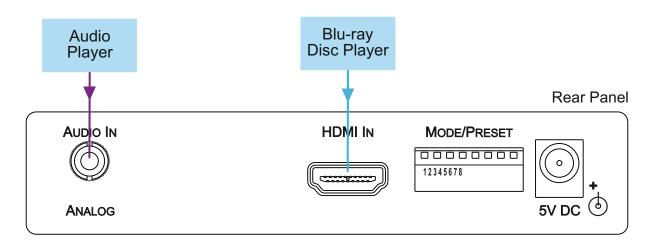

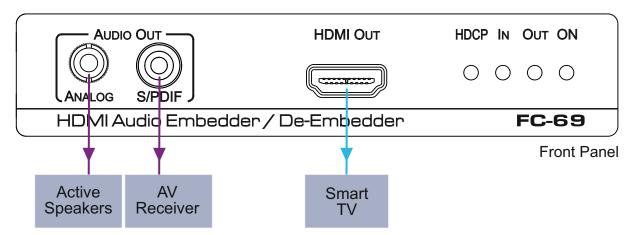

Always use Kramer high-performance cables for connecting AV equipment to the FC-69.

Step 4: Set the DIP-switches

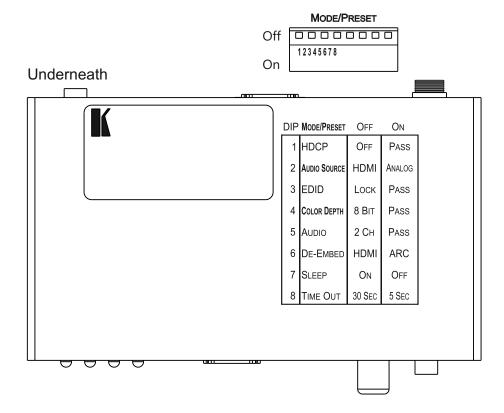

Step 5: Connect the power



Connect the 5V DC power adapter to the FC-69 and plug the adapter into the mains electricity.

Quick Start (P/N: 2900-300451QS REV 1)



