
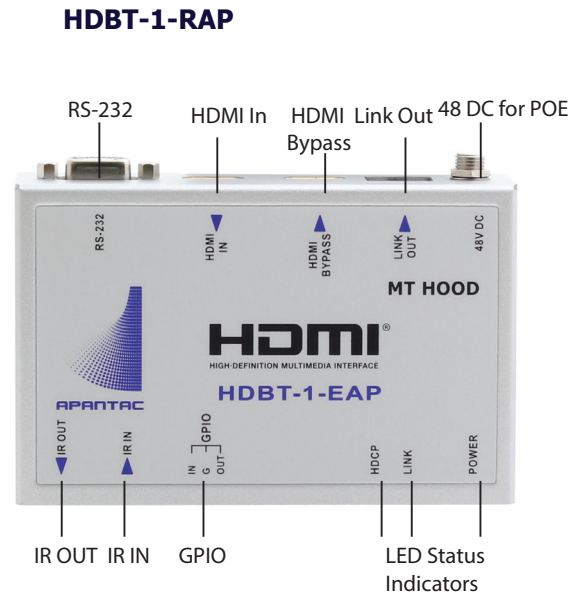


HDBASET HDMI EXTENDERS & RECEIVERS w/ POE/VGA INPUT

HDBT-SET-5-II (HDBT-1-EAPV-II + HDBT-1-RAP) (330 FT/100 m)

- Single port HDBaseT extender and receiver Set
- Supports VGA input as well as HDMI input
- HDMI loop out
- Extend HDMI signals up to 328 feet (100 meters)
- Supports assignable POE (Power Over Ethernet) from Tx to Rx or Rx to Tx
- Supports HDMI and DVI formats; UHD@60Hz (4:2:0), 1080P, HD, 3D
- Supports VGA inputs up to 1920x1200 with analog audio input
- Full audio support, infraRed and RS232 control

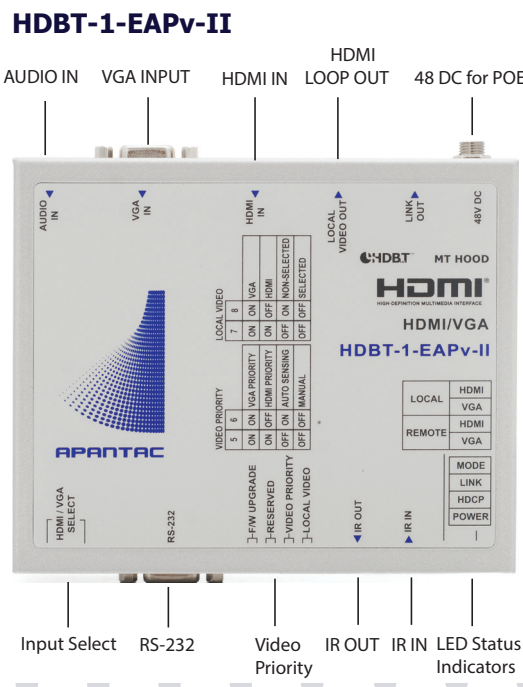

Recommended cables: CAT5 - Belden 1212F, CAT6 - Belden 2412F

MODEL	HDBT-1-EAPv-II	HDBT-1-RAP
DESCRIPTION	Switchable VGA (w/Audio) or HDMI HDBaseT Extender with IR, RS232`	Single-port HDBaseT HDMI Receiver with IR, RS232, GPI and assignable POE
INPUTS	1 x HDMI 1 x VGA with analog audio 1 x RS232 1 x IR (3.5 mm Jack) 1 x Terminal Block for switch	1 x RJ45 (Link) 1 x Direct IR Receiver (On Top) 1 x Extended IR Receiver (3.5 mm Jack)
OUTPUTS	1 x RJ45 (Link) 1 x HDMI Loop out 1 x IR Out (3.5 mm Jack for Emitter)	1 x HDMI 1 x RS232 1 x Terminal Block for GPI Out
RESOLUTION	Maximum Resolution of UHD @ 60Hz (4:2:0) / 1920 x 1200 (including 1080P and 3D) up to 330 feet (100 meters)	
DIMENSIONS	140 mm W x 114 mm D x 37.5 mm H	122 mm W x 74 mm D x 38 mm H
POWER	DC 48 V	POE