



# HDMI 2.0 UHD MULTIVIEWER


- Can display up to 4 video inputs on the same screen
- Supports 4 x HDMI inputs (UHD, HD and SD) as well one displayport and one analog VGA inputs
- Windows can be sized and moved freely
- Supports true 4K/UHD input up to 4K@60Hz at 4:4:4
- Supports true 4K/UHD output up to 4K@60Hz at 4:4:4
- Supports Deep color and HDCP 1.4 and 2.2
- Supports Dolby Digital 5.1, DTS 5.1 and uncompressed 7.1
- Analog stereo audio monitoring output
- Can be controlled via RS-232, Ethernet or Webpage

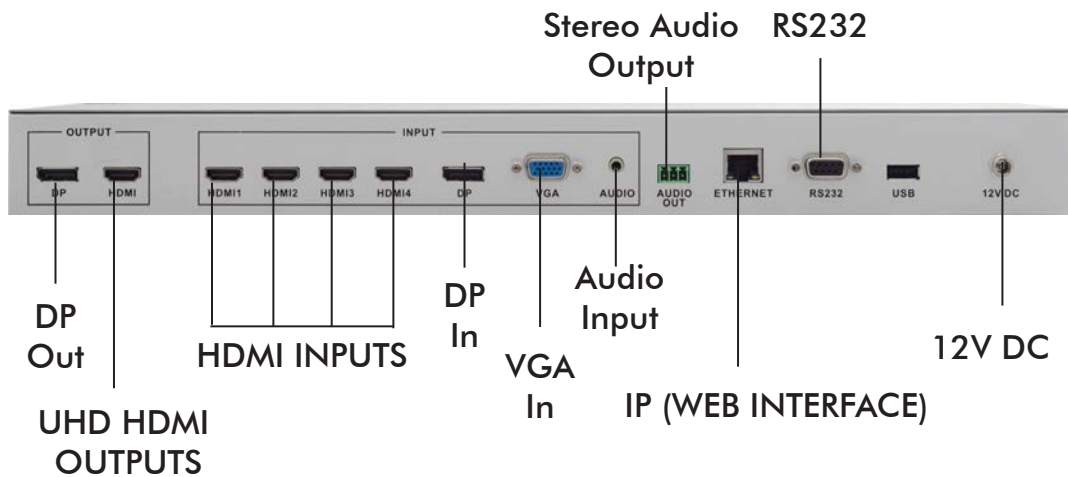


**Layout Examples: These are actual screen output captures.  
Not artist renderings!**

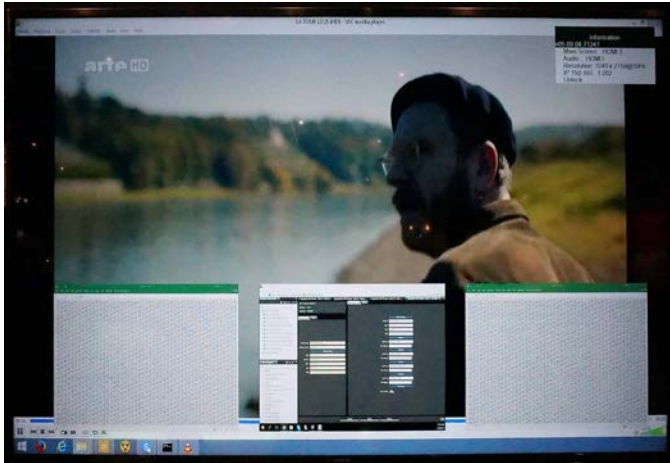


Picture in Picture Mode

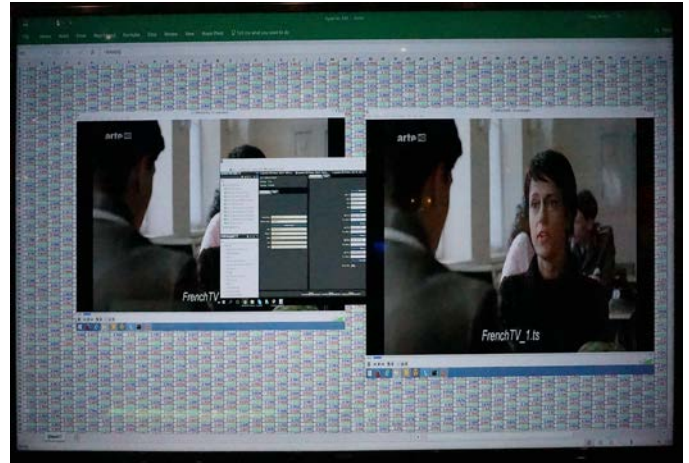

Multi-layer Picture in Picture Mode

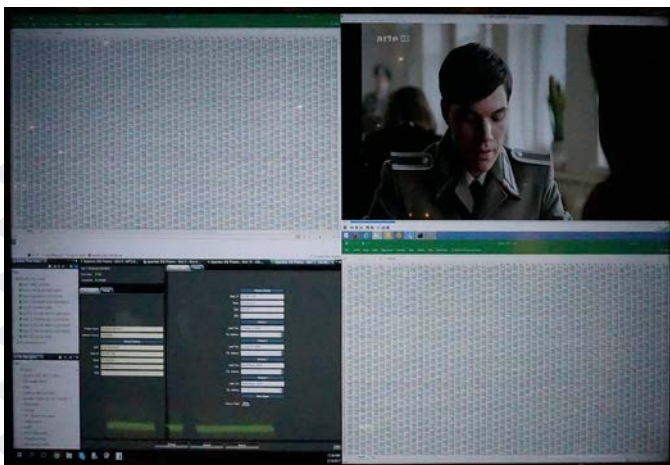

Quad Split Mode

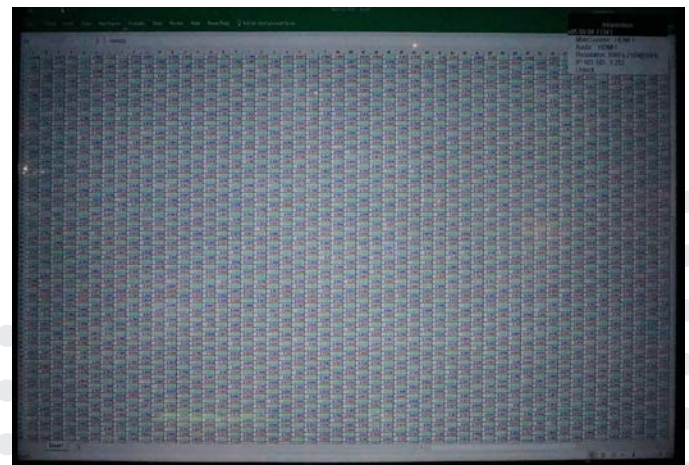

Full Screen Mode

MODEL	MiniIDE-4-UHD
Description	UHD Multiviewer
Input	4 x HDMI (Female), DP 1.2 x 1, VGA x 1, stereo audio x 1
Output	HDMI 2.0 UHD 4:4:4 with DP 1.2 loop through and stereo audio monitoring output
Max Input Resolution	4096 x 2160 @ 60Hz, 4:4:4 color sampling
Control	Ethernet and RS232
Power Supply	DC 12 3.34A 40W, FCC, CE, UL CCC and PSE
Power Consumption	15 W
Environment	Operating temperature 0 ~ 45 C
	Operating humidity 20 ~ 90% RH
	Storage temperature -20 ~ 60 C
Dimension	1 RU - 440.4 x 230 x 45 mm (L x W x H)
Weight	2.72 Kg