

CRESCENT MINI-DE-II COMPACT HDMI MULTIVIEWER

Mini-DE-II COMPACT MULTIVIEWER

Key Features

- Low power consumption (15W per MiniDE-II)
- Compact in depth (10 inches / 25 cm)
- 4 HDMI Windows can be moved and sized freely
- Up to 3 modules can be inserted into a 1RU
- 8 channels of embedded audio per HDMI input
- Multiple outputs in DVI/HDMI and SDI
- Output resolution up to 1920x1200 (incl. 1080p)
- UMD, tallies, borders
- Analog and digital clocks
- 3 year limited warranty


Accessories

Standard

- DC 12V power supply
- RJ50 to DB9 for GPI
- Breakout terminal block
- RJ45 to DB9 for Serial
- CD (software, manual)

Options

- 1 RU rack mount

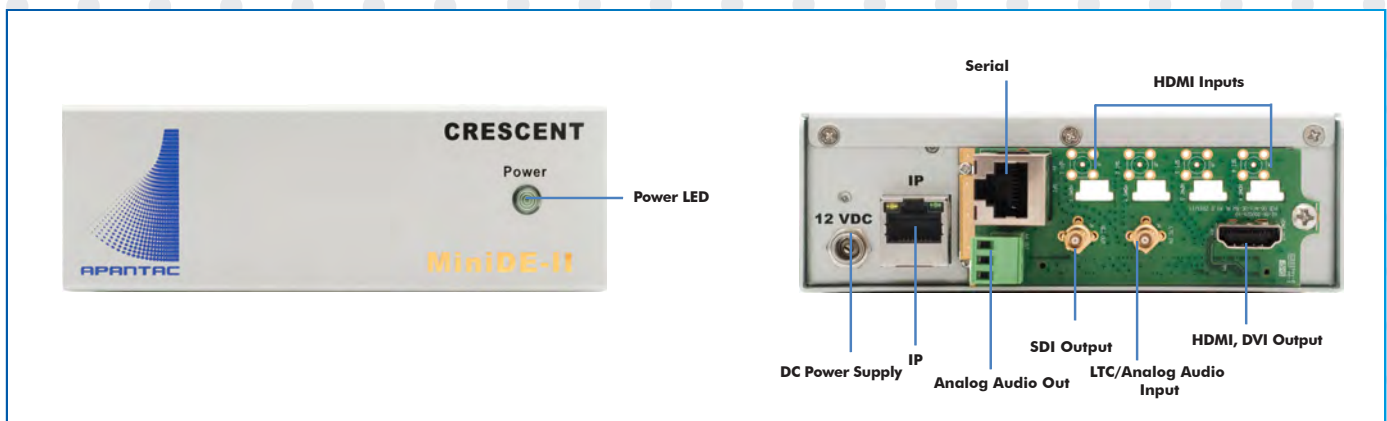

SPECIFICATIONS

Total Windows	4	Output	1 x HDMI/DVI, 1 x SDI
Inputs	HDMI / DVI	HDMI	800x480 to 1920x1200 (1080p) 50/59.94/60Hz
Connector Type	HDMI Type D	Connector Type	HDMI Type A
Maximum Resolution	up to 1920x1200/1080P60	SDI	Matching the HDMI output resolution up to 3G with valid SDI resolutions
Embedded Audio	8 channels	Connector Type	HD-BNC
LTC	1	Analog Audio Output	1
Connector Type	HD-BNC	On Screen Display	Borders, Labels, Tallies, Audio meters, Alarm tags, Safe area markers
GPI	8 for tally or AXP (ASCII command)	IP	1000 Base-T, TSL, AXP_Lite protocol
Connector Type	RJ-50 (with Terminal Block)	Power	17W



RJ50-DB9: GPI Adapter



RJ45-DB9: RS232 Adapter



DB9 GPI Breakout