


UNIVERSAL SCALER

- 2 input Universal Scaler
- 2x Input HDMI, DVI, VGA, YPbPr, and composite
- PIP, Side by Side or 2 x 1 switch mode
- Stereo analog audio input
- Output SDI in 720P, 480P, 480i, 1080i, 1080p
- Output frequency in 50, 59.94, 60 Hz
- IP control*
- RS232 control
- HDMI output
- Optional redundant power supply

*US-2500 feature



US-2000

Universal Scaler HDMI/DVI/VGA/YPbPr
Input, SDI Output
US-2000 Front

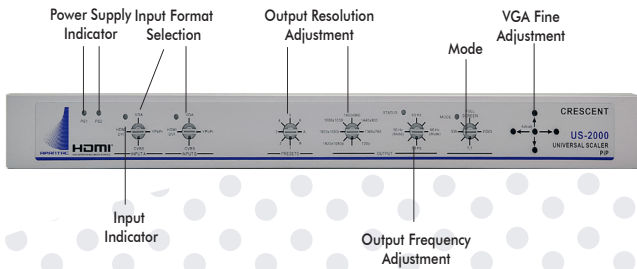


US-2500

Universal Scaler HDMI/DVI/VGA/YPbPr
Input, SDI Output with Genlock
US-2500 Front

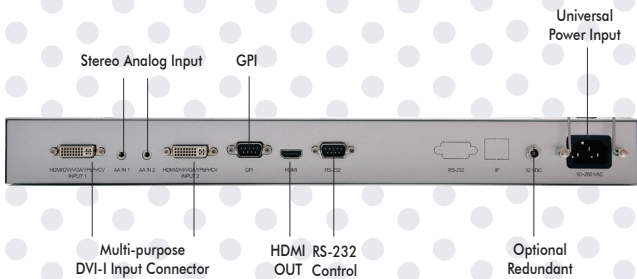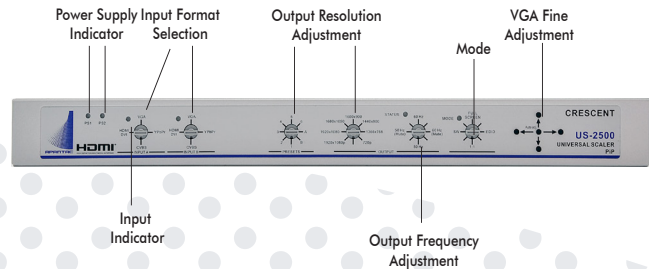

US-2000 Rear

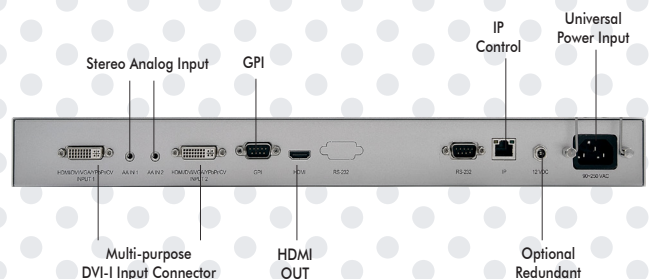

US-2500 Rear

MODEL	US-2000	US-2500
DESCRIPTION	Universal Scaler with HDMI Output	Universal Scaler with HDMI Output
INPUT	2 x HDMI, DVI, VGA, YPbPr, Composite	2 x HDMI, DVI, VGA, YPbPr, Composite 2 x
OUTPUT	HDMI output	HDMI output
AUDIO INPUT	Stereo Analog	Stereo Analog
IP Control	n/a	Yes
POWER	AC 90 - 250 with Optional Redundant DC 12V	AC 90 - 250 with Optional Redundant DC 12V
DIMENSIONS	1 RU	1 RU
MOUNT	19" Rack Mount	19" Rack mount


- Universal Scaler • Input HDMI, DVI, VGA, YPbPr, and composite
- Stereo analog audio input • Output SDI in 720P, 480P, 480i, 1080i, 1080p
 - Output frequency in 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 Hz
- IP and RS232 control • Dual SDI output • Reference in with loop out*
 - Optional redundant power supply

***US-3500 feature**

US-3000

Universal Scaler HDMI/DVI/VGA/YPbPr
Input, SDI Output



US-3000 Front

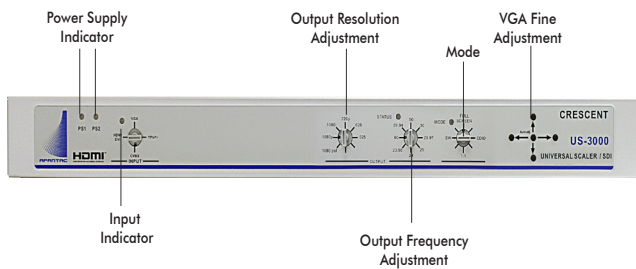


US-3500

Universal Scaler HDMI/DVI/VGA/YPbPr
Input, SDI Output with Genlock

US-3500 Front

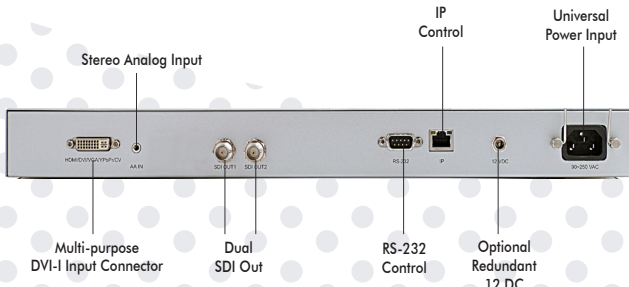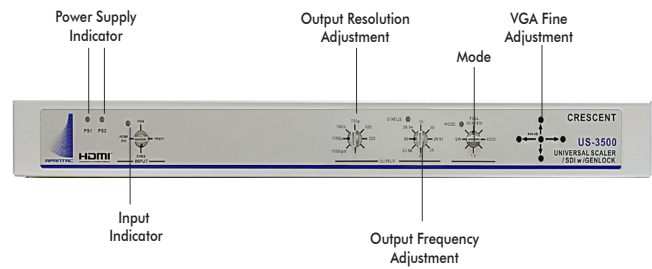

US-3000 Rear

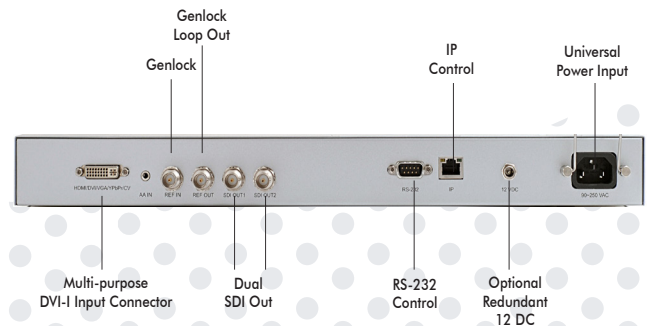

US-3500 Rear

MODEL	US-3000	US-3500
DESCRIPTION	Universal Scaler with Dual SDI Output	Universal Scaler with Genlock and Dual SDI Output
INPUT	HDMI, DVI, VGA, YPbPr, Composite	HDMI, DVI, VGA, YPbPr, Composite
OUTPUT	Dual SDI output in 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 Hz	Dual SDI output 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 Hz
AUDIO INPUT	Stereo Analog	Stereo Analog
Genlock	n/a	Analog Black Burst with Loop Out
POWER	AC 90 - 250 with Optional Redundant DC 12V	AC 90 - 250 with Optional Redundant DC 12V
DIMENSIONS	1 RU	1 RU
MOUNT	19" Rack Mount	19" Rack mount