


F-7H mk2 *New* The brightest 7" field monitor with Preset Touch Key



Main body Dimensions

Main Body 211 x 125 x 28.3 (mm) / 8.3 x 4.95 x 1.11 (inch)
Weight 0.8kg / 1.76 lbs

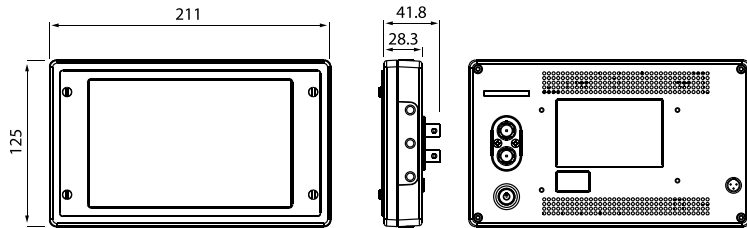

Product Highlights

- 7" Full HD Resolution (1920 x 1080)
- Luminance up to 3,600cd/m²
- Preset Touch Key pad
- Excellent Sharpness
- Peaking Boost
- Anti reflection
- Waveform/ Vectorscope
- H/V Flip
- Auto Flip
- HDR Emulation (PQ, HLG, S Log 3)
- Split Zoom
- Arri Metadata
- Focus Assist
- Custom 3D LUT Import
- Anamorphic Desqueeze
- Camera LUTs support
- HDMI ↔ SDI cross conversion
- Luma(Y) Zone Check
- Zoom

Optional Accessories



Size	7"
Resolution	1920 x 1080 (16 : 9)
Pixel Pitch	0.078(H)x0.078(V)mm
Color Depth	16.7M
Viewing Angle (Typ.)	160°(H) / 160°(V)
Luminance (Max.)	3600cd/m ²
Contrast Ratio	1200:1
Display Area	151.2(H)x94.5(V)mm
Input	
1 x BNC	SDI Input
1 x HDMI	HDMI Input
Output	
1x BNC	SDI Output, HDMI to SDI conversion output
1x HDMI	HDMI Output, SDI to HDMI conversion output
Input Signal	
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI	1080p(60/59.94/50/30/25/24/23.98) / 1080i(60/59.94/50) / 720p(60/50) / 480i(60/480p(60) / 576i(50)/576p(50)
SDI Input Signal Formats	
SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i (60/59.94/50) 1080p (30/29.97/25/24/24sF/23.98/23.8sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048x1080p(24/24sF/23.98/23.98sF)
Additional features	Front partial touch screen 4-direction optical sensors (Tilt Switches)
Audio In	Embedded Audio
Audio Out	Analog Stereo (Phone Jack)
Power	DC 12V 12V 1.8A / 34V 0.6A
Power Consumption (Approx.)	TBD
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	D-Tap Cable Camera Mount / BNC Connector