

MT HOOD

MiniDE-4-UHD-K


HDMI 2.0 UHD Multiviewer with KVM (Keyboard and Mouse Switching)



MiniDE-4-UHD-K

Key Features

- Can display up to 4 computers with keyboard and mouse function on a single screen
- Supports 4x HDMI inputs (UHD, FHD and SD)
- Multiviewer is a fixed quad split
- Double click on the scroll wheel to go full screen
- Supports true 4K/UHD inputs up to 4K@60Hz at 4:4:4
- Supports deep color, HDCP 1.4 and 2.2
- Supports Dolby Digital 5.1 and uncompressed 7.1
- Analog stereo audio monitoring output

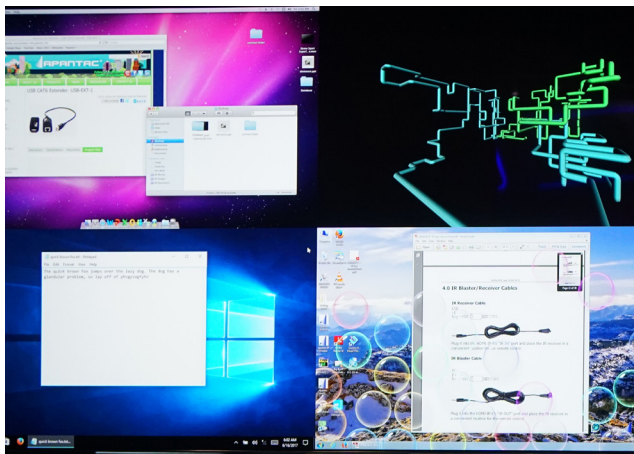


Layout Example: actual screen output captures
and not artist renderings

MT HOOD

MiniDE-4-UHD-K

Rear view



- 2x USB Type A outputs (keyboard and mouse)
- 4x USB Type B inputs (connect up to 4 computers)
- 1x HDMI output that supports up to 4K/UHD@60Hz output
- 4x HDMI inputs that supports up to 4K/UHD@60Hz inputs
- 1x3 pin for audio output
- 1x RJ45 (reserved for future Ethernet control)
- 1x DB9 (reserved for RS-232 control)
- 1x USB Type A port for FW upgrade
- 12V DC power inlet

Related Products

UE-4-K

4 input UHD mutliviewer with advanced OSD and KVM functionality

UE-8-K

8 input UHD mutliviewer with advanced OSD and KVM functionality

MiniDE-4-UHD

4 input UHD mutliviewer with both HDMI and DisplayPort

MiniDE-4-UHD-II

4 input HDMI UHD mutliviewer

Specifications

Model	MiniDE-4-UHD-K
Description	UHD Multiviewer with KVM functions
Inputs	4x HDMI
Output	HDMI 2.0 UHD 4:4:4 with quad-split multiviewer
Keyboard Mouse	2x USB Type A for keyboard and mouse
Max Resolution	4096x2160 @ 60Hz 4:4:4
Power	DC 12V, 3.34A, 40W
Power Consumption	15W
Environment	Operating temperature: 0 ~ 45 C
	Operating humidity: 20 ~ 90% RH
	Storage temperature: -20 ~ 60 C
Dimension	1RU - 440.4 x 230 x 45 mm (L x W x H)
Weight	2.72 kg