


Designer Aesthetics Audiophile Performance Installation Ease

MULTIPURPOSE LOUDSPEAKER SPECIFICATIONS SHEET



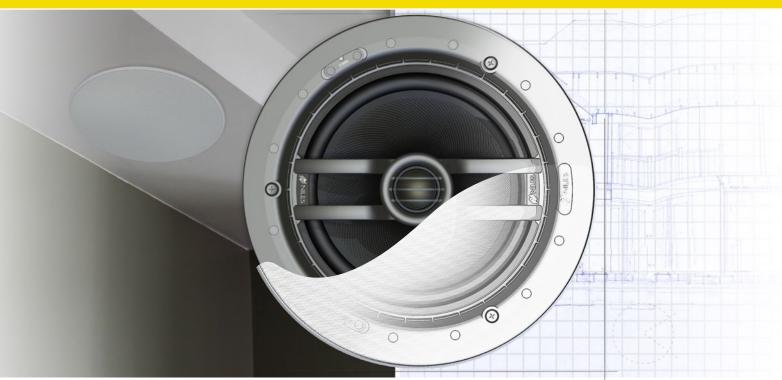

8" 2-WAY CEILING-MOUNT MULTI-PURPOSE LOUDSPEAKER



Multipurpose loudspeakers are optimal for distributed audio and home theater applications. Durable glass fiber woofer cones and UltraSilk® soft dome tweeters provide smooth, pleasing sound throughout the sonic spectrum.

FEATURES AND BENEFITS

- Designer Aesthetics Magnetically attached MicroThinTM speaker grilles ensure a clean, virtually invisible appearance that blends with the room's aesthetics. Optional square grilles provide added design flexibility.
- Superior Sound Quality Precision tuned and voiced fixed woofer ceiling-mount loudspeakers provide graduated performance for all types of applications. Whether you are listening to background talk radio or a complete orchestra, Niles CM series delivers optimal performance and reliability.
- Installation Ease Three patent-pending spring tensioned mounting clamps permit quick installation and compensate for uneven mounting surfaces and varied environmental conditions. Weather-resistant construction enables installation in moist areas, such as bathrooms or outdoors under eaves.
- Install With Confidence The best-built loudspeakers deserve the best protection—the Niles Lifetime Limited Warranty.



2-WAY CEILING-MOUNT LOUDSPEAKERS

CM8MP

8" 2-Way Ceiling-Mount Multi-**Purpose Loudspeaker With Pivoting Tweeter**



Packaged Individually with Round MicroThin™ Grille

Stock Number

FG01661

RELATED PRODUCTS SG8C 8" Square Loudspeaker Grille Stock Number: FG01646 NCB8C 8" New Construction Bracket Stock Number: FG01648

FEATURES

- Integrated woofer/baffle design delivers greater low frequency response by employing a 8" woofer where competitive models of the same outer size employ 6 1/2" woofers
- Polypropylene cone is light, strong and well damped to provide "best in class" bass response
- Butyl rubber surround damps resonance and provides exceptional durability
- 1" fluid-cooled UltraSilk® soft-dome tweeter provides for clear and detailed high frequency response
- Proprietary bridge-mounted tweeter-adjustment mechanism focuses the high frequency sound in any direction up to 20° without diffraction
- Magnetically attached, rust-resistant grille covers install quickly and provide a low profile look
- Weather resistant construction reduces installation limitations and provides unique solutions in moist environments or outdoors under eaves

SPECIFICATIONS

- Frequency Response: 50Hz to 21kHz +/-3dB
- Impedance: 8 ohm nominal; 6 ohm minimum
- Recommended Amplifier Power: 10 to 140 Watts

DIMENSIONS

- Frame Dimensions: 11 3/8 inches (28.9 cm)
- Hole cutout dimensions: 9 3/4 inches (24.8 cm)
- Depth behind ceiling (5/8" drywall): 4 1/8" (10.5 cm)
- Shipping Weight: 6.4 lbs (2.9 kg)

WARRANTY: Lifetime Limited



BLENDING HIGH FIDELITY AND ARCHITECTURE®





























1-800-BUY-HIFI - www.nilesaudio.com