

User Manual

ATLONA

1 BY 2 MINI DISPLAYPORT SPLITTER AT-MDP12



www.atlona.com | toll free: 1-877-536-3976 For International: 1-408-962-0515

TABLE OF CONTENTS

1. Introduction	 3
2. Package Contents	 3
3. System Requirements	 3
4. Features	 3
5. Specification	 3
6. Panel Descriptions	 4
6.1 Front Panel	 4
6.2 Rear Panel	 4
7. EDID Support Format	 5
8. Connection and Installation	 5
9. Safety Information	 6
10. Warranty	 7
11. Atlona Product Registration	 8

TLONX



INTRODUCTION

Atlona Technologies AT-MDP12 is a 1 input to 2 outputs Mini DisplayPort splitter designed to allows any single Mini DisplayPort enabled computer (such as MacBook Pro, MacPro, Air, MacMini and so on) the ability to be displayed on two Mini DisplayPort monitors simultaneously. Most common monitors are Apple 24" LED and Apple iMac 27", the splitter will also work with DisplayPort monitors (Dell, HP and others); however a Mini DisplayPort to DisplayPort adapter will be required, Atlona makes such an adapter as well. This unit supports video resolution up to 2560 x 1600 and audio of PCM 7.1 & AC3. Audio can also be bypassed through the unit's USB connection, the same USB is used to power the splitter. With four sets of EDID formats, the AT-MDP12 provides a fast switch between source and display and saves the EDID's reading sink time to allow image to be displayed properly.

PACKAGE CONTENTS:

- AT-MDP12 Splitter
- Operation Manual
- 1 x 5ft mini-DP cable (male to male)
- 1 x 5ft Y cable 2x USB type A to 1x USB type B

SYSTEM REQUIREMENTS:

Mini DisplayPort or DisplayPort output source equipment with Mini DisplayPort input monitors.

FEATURES:

- Supports resolution up to 2560 x 1600
- Supports audio up to PCM 7.1 & AC3, Apple monitors don't allow audio to pass though Mini Display Port, therefore please use USB connection for Audio
- Supports EDID switching and settings.
- Power over USB.


SPECIFICATIONS:

Sampling Rate	192kHz		
Input port	1 x Mini DisplayPort , 1 x Mini USB		
Output port	2 x Mini DisplayPort , 1 x USB (A Type)		
ESD Protection	Human body model: ± 8kV (air-gap discharge) ± 4kV (contact discharge)		
Dimensions (inch)	7(W) x 4.8(D) x 1.96(H)		
Weight	1.5Lb		
Chassis Material	Aluminum		
Silkscreen Color	Black		
Operating Temperature	0°C~40°C / 32°F ~ 104°F		
Storage Temperature	-20°C~60°C / -4°F ~ 140°F		
Relative Humidity	20~90% RH (non-condensing)		



PANEL DESCRIPTION

1. Front Panel

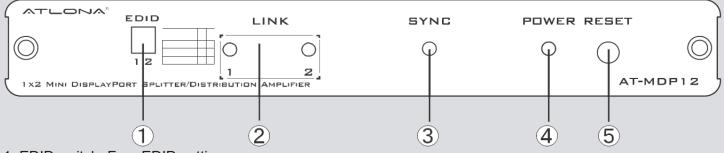


1. EDID switch: Four EDID setting. Below is the mode definition chart.

Mode	Select		EDID Fuction
	1	2	
1	\uparrow	\uparrow	Copy TV EDID
2	\uparrow	\downarrow	640x480MODE
3	\downarrow	\uparrow	1920x1200 MODE
4	\downarrow	\downarrow	2560x1440 MODE

2. LINK LED: When the device detects the display and sends out the signal the Link LED will illuminate.

- 3. SYNC LED: When the device detects the source signal the SYNC LED will illuminate.
- 4. Power LED: The LED will illuminate in green when power on and in red when in standby mode.
- 5. Reset button: Press this button to reset your EDID after each EDID setting.

2. Rear Panel

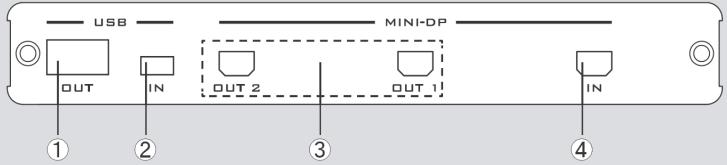

- 1. USB OUT: Connect a USB A type cable to the display monitor or PC/notebook for audio & USB signal bypass.
- 2. USB IN: Connect a mini USB cable from your PC/notebook for power and pass-though
- 3. MINI-DP OUT 1 & 2: Connect the MDP cable or MDP to DP cable to your MDP/DP input display for displaying a single source on two screens simultaneously.
- 4. MINI-DP IN: Connect the MDP cable or MDP to DP cable from the MDP/DP source for signal sending.



EDID SUPPORT FORMAT

Select MODE	VGA	1920x1200	2560x1440				
Video Support							
640x480@60	V	V	V				
800x600@60		V	V				
1024x768@60		V	V				
1920x1200@60		V	V				
1280x960@60		V	V				
1344x1008@60		V	V				
1280x1024@60		V	V				
1600x1200@60		V	V				
2560x1440			V				
720p			V				
Audio Support							
PCM 2CH 48K			V				
PCM 2CH 44.1K			V				
PCM 2CH 32K			V				

CONNECTION AND INSTALLATION



SAFETY INFORMATION

Safeguards

To reduce the risk of electric shock, do not expose this product to rain or moisture.

If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.

Do not modify the wall plug. Doing so will void the warranty and safety features.

This equipment should be installed near the socket outlet and the device should be easily accessible in case it requires disconnection.

Precautions

FCC Regulations state that any unauthorized changes or modifications to this equipment not expressly approved by the manufacturer could void the user's authority to operate this equipment.

Operate this product using only the included external power supply. Use of other power supplies could impair performance, damage the product or cause fires.

In the event of an electrostatic discharge, this device may automatically turn off. If this occurs, unplug the device, and plug it back in.

Protect and route power cords so they will not be stepped on or pinched by anything placed on or against them. Be especially careful of plug-ins, or cord exit points from this product. Avoid excessive humidity, sudden temperature changes or temperature extremes.

SIMPLE, EASY

Keep this product away from wet locations such as bathtubs, sinks, laundries, wet basements and swimming pools.

Use only accessories recommended by ATLONA to avoid fire, shock or other hazards.

Unplug the product before cleaning. Use a damp cloth for cleaning. Do not use cleaning fluid or aerosols, which could enter the unit and cause damage, fire or electrical shock. Some substances may also mar the finish of the product.

Never open or remove unit panels or make any adjustments not described in this manual. Attempting to do so could expose you to dangerous electrical shock or other hazards. It may also cause damage to your AT-MDP12. Opening the product will void the warranty.

Do not attempt to service the unit. Instead disconnect it and contact your Authorized ATLONA reseller or contact ATLONA directly.

1. LIMITED WARRANTY

Atlona Technologies warrants that (a) its products (the "Product") will perform substantially in accordance with the accompanying written materials for a period of 3 YEARS from the date of receipt and (b) that the Product will be free from defects in materials and workmanship under normal use and service for a period of 3 years. In the event applicable law imposes any implied warranties, the implied warranty period is limited to 3 years from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply to Customer.

2. CUSTOMER REMEDIES

Atlona Technologies and its suppliers' entire liability and Customer's exclusive remedy shall be, at Atlona Technologies' option, either return of the price paid for the Product, or repair or replacement of the Product that does not meet this Limited Warranty and which is returned to Atlona Technologies with a copy of Customer's receipt. This Limited Warranty is void if failure of the Product has resulted from accident, abuse, or misapplication. Any replacement Product will be warranted for the remainder of the original warranty period or 3 year, whichever is longer.

3. NO OTHER WARRANTIES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ATLONA TECHNOLOGIES AND ITS SUPPLIERS DISCLAIM ALL OTHER WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IM-PLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH REGARD TO THE PRODUCT AND ANY RELATED WRITTEN MATERIALS. THIS LIMITED WARRANTY GIVES CUSTOMER SPE-CIFIC LEGAL RIGHTS. CUSTOMER MAY HAVE OTHER RIGHTS DEPENDING ON THE JURISDICTION.

4. NO LIABILITY FOR DAMAGES

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL ATLONA TECHNOLOGIES OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING WITHOUT LIMITATION, SPECIAL, IN-CIDENTAL, CONSEQUENTIAL, OR INDIRECT DAMAGES FOR PERSONAL INJURY, LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS PRODUCT, EVEN IF ATLONA TECHNOLOGIES HAS BEEN AD-VISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, ATLONA TECHNOLOGIES' AND ITS SUPPLIERS' ENTIRE LIABILITY UNDER ANY PROVISION OF THIS AGREEMENT SHALL BE LIMITED TO THE AMOUNT ACTU-ALLY PAID BY YOU FOR THE PRODUCT. BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.



ATLONA PRODUCT REGISTRATION

Thank you for purchasing this Atlona product — we hope you'll enjoy it.

We also hope that you'll take a few moments to register your new purchase. Registration creates an ownership record if your product is lost or stolen and helps ensure you'll receive notification of performance issues and firmware updates.

At Atlona, we respect and protect your privacy and assure you that your registration information is completely secure. Of course, Atlona product registration is totally voluntary and failure to register will not diminish your limited warranty rights.

To register go to www.atlona.com/registration