







Wireless N for flexible placement



Day/Night: See up to 15-feet in the dark



Sound/Motion Detection: Trigger recording and send email alerts



Wi-Fi Extender: Expands wireless range



Remote Viewing: View on iPhone®, iPad® or Android® with mydlink™ app

ENVIROMUX-IPCAM-WN

Wireless Day/Night Network Camera

Day/Night Network Camera

The ENVIROMUX-IPCAM-WN Wireless Camera delivers high-quality video for remote viewing on the mobile devices you already own. And with a built-in ICR filter and IR LEDs, you'll also get clear images in complete darkness to provide you with the ideal 24-hour monitoring solution. Its compact design means it can be placed virtually anywhere in your home or small office, and with a built-in microphone you can see and hear more of what matters most.

Audio/Motion Sensing Technology

Integrated sound/motion-sensing technology detects changes within the camera's environment, triggering instant email alerts and even auto-recording. Round the clock notification delivers an additional layer of security and confidence.

Features

- Remotely Monitor Your Home or Office Over the Internet
- IR LED for Night Viewing
- 1.0 Lux for Low-light Environments
- 4x Digital Zoom For Close-up Viewing
- Built-in Microphone¹
- Real-time H.264 and MJPEG Video Compression
- Sound and Motion Detection to Trigger Recording and Send E-mail Alerts
- iPhone[®], iPad[®], or Android[®] App for Remote Viewing²
- mydlink.com Portal for Easy Viewing and Management
- Administrator/User Password Protection
- UPnP® Support for Network Setup & Configuration
- IEEE 802.11n and 802.11g Compliant
- Wi-Fi Protected Setup™ (WPS) Push Button for Easy Network Setup
- Extender Mode for Expanding Wireless Range
- 24/7 Basic Installation Support³
- 1-Year Limited Warranty⁴

Minimum System Requirements

Wired (10/100 Fast Ethernet) or Wireless (802.11g or 802.11n) Network (Wireless N network recommended for optimum wireless performance)

Computer with:

- 1.3GHz Processor
- 128MB Memory
- Windows® 8⁵, Windows® 7⁵, Windows Vista®⁵ and Windows® XP SP3®⁵, or Mac OS X (10.5 and above, Intel Processor)
- Internet Explorer® v6, Mozilla® Firefox®, Google® Chrome, or Safari® v4

For Internet Access:

- · Cable or DSL Modem
- Subscription with an Internet Service Provider (ISP)

Package Contents

- ENVIROMUX-IPCAM-WN
- Ethernet Cable
- Power Adapter
- Camera Base and Mounting Kit
- Quick Install Guide

Network Camera with mydlink

Enjoy the freedom and assurance of both local and remote viewing with the free mydlink Lite app for your iPhone®, iPad® or Android® device. Experience the peace of mind of seeing your loved ones and valuables with your own eyes, whenever and wherever you want .

Make Easy Setup Even Easier – With Zero Configuration


Connecting your amera with any router is easy.

Zero Configuration automatically configures and intelligently syncs your camera to your mydlink account – it's as easy as connect and view!

Easy Installation, Professional Performance, Anywhere Access



Wi-Fi extender can help boost network signal to reduce dead spots

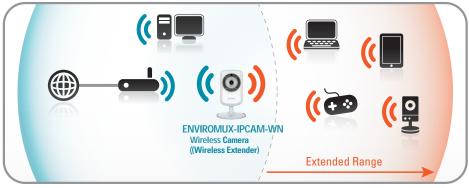





| Technical Specifications | | |
|---|--|---|
| Camera | | |
| Hardware Profile | VGA 1/5 inch CMOS Sensor Up to 4x digital zoom IR LED for Night Viewing | Minimum Illumination: 1 Lux at F2.8 Focal Length: 3.15mm lens |
| Field of View | • (H) 45.3°, (V) 34.5°, (D) 54.9° | |
| Image Features | Adjustable image size and quality Time stamp and text overlay | • Flip and mirror |
| Video Compression | • H.264/MJPEG | JPEG for still images |
| Video Resolution | • Up to 30 frames at 640x480, 320x240,160x120 | |
| Audio Support | • PCM | |
| External Device Interface | • 10/100Base-T | • IEEE 802.11n |
| Network | | |
| Network Protocols | IPV4, ARP, TCP, UDP, ICMP DHCP Client NTP Client (D-Link) DNS Client DDNS Client (D-Link) SMTP Client | FTP ClientHTTP ServerPPPoEUPnP Port ForwardingLLTD |
| Security | • WEP, WPA-PSK, WPA2-PSK | |
| System Management | | |
| System Requirements for Web Interface | Browser: Internet Explorer, Mozilla Firefox, or Google Chrome, Safari | |
| Event Management | Sound/Motion detection Event notification and upload snapshots/video clips via email or FTP | Supports multiple SMTP and FTP servers Multiple event notification Multiple recording methods for easy backup |
| Remote Management | Configuration accessible via web browser Take snapshots/video clips and save to local hard drive or NAS via web browser | |
| Mobile Support | • mydlink™ mobile app for iOS and Android mobile devices | |
| D-ViewCam™ System Requirements | Operating System: Windows XP/Windows Vista / Windows 7 / Windows 8 | |
| D-ViewCam [™] Software Functions | Remote management/control of up to 32 cameras Viewing of up to 32 cameras on one screen | Supports all management functions in web interface Scheduled motion triggered or manual recording options |

| General Specifications | | | |
|------------------------|--|---------------------|--|
| External Power Adaptor | • Input – 100-240 VAC, 50/60 Hz | • Output – 5VDC, 1A | |
| Max. Power Consumption | • 4.0 watts | | |
| Operating Temperature | • 32° to104°F (0° to 40°C) | | |
| Storage Temperature | • -4° to 158° F (-20° to 70° C) | | |
| Operating Humidity | • 20% to 80% non-condensing | | |
| Storage Humidity | • 5% to 95% non-condensing | | |
| Certifications | • FCC • IC | • C-Tick • CE | |
| Dimensions | • Including the bracket and stand: 2.6" x 2.6" x 5" (27.2mm x 60mm x 96mm) | | |
| Weight | • 0.21lb (95g) | | |
| Warranty | | | |
| Warranty | •2-Year Limited | | |
| Order Information | | | |
| Part Number | Description | | |
| ENVIROMUX-IPCAM-WN | Wireless Camera | | |