


Rocquette™ SweetSpot

ROCQUETTE™
SWEETSPOT

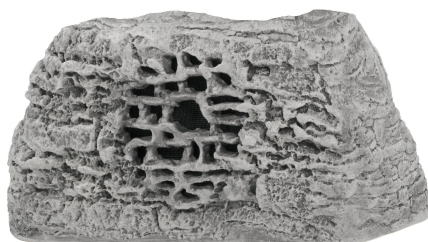

Specifications: Rocquette™ SweetSpot

Mounting hardware included

Nominal Impedance	4 ohm
Impedance (min)	4.0 ohm
Sensitivity dB @ 2.83V/1M	92.0 dB
Sensitivity dB @ 1W/1M (2)	89.0 dB
Frequency Response (± 3 dB)	71 Hz - 20 kHz
Frequency Response (±10 dB)	60 Hz - 20 kHz
Max. Program Power	140 Watts
Max. Continuous Power RMS	70 Watts
Max. Power SPL @ 1 M	106.5dB
Transducer - Low Frequency Driver	6.5" Dual Voice Coil
Transducer - High Frequency Driver	(2) .75" Soft Dome
Colors	Brown, Grey, Sandstone
Tweeter - part	(2) .75" Soft Dome
Inputs	Wire lead
Height (SM = Height)	228.6 mm / 9.0"
Diameter (SM = Width)	393.7 mm / 15.5"
Weight	7.3 kg / 16 lb
Shipping Weight	10.0 kg / 22 lb
Accessories Optional	Security Bracket (RSB1)
Owner's Manual - color	Download Owners Manual
Regulatory - CE	approved
Applications	The Rocquette will bring clear, inconspicuous sound to medium sized back yards, patios, pools, gardens, or courtyards.

Rocquette™ SweetSpot

ROCQUETTE™
SWEETSPOT



Key Features

- 6.5 inch (203 mm) coaxial, two way weather resistant low frequency driver and one 1.0 inch (25 mm) weather resistant, high frequency driver.
- UV-, scratch-, chlorine- and weather resistant enclosure with professional grade components for long-lasting performance and durability.
- Layered and weathered shale texture.
- Open grille design is suited for placement in dense plants and shrubs.
- Color options: brown, gray or sandstone.
- Optional accessories: 64 Watt 70/100 volt transformer

Description

Designed with a weathered / layered shale appearance, the Rocquette has a low vertical profile enabling its use underneath shrubs or among low plants. Its design incorporates a dual voice coil 6.5" woofer and two ¾" tweeters, providing optimal separation of left and right channels within a single enclosure.

Applications

The Rocquette will bring clear, inconspicuous sound to medium sized back yards, patios, pools, gardens, or courtyards.

This product uses our amazing technology

All Rockustics cabinets are constructed from a non-polluting stone and resin compound. The cabinets maintain a natural aesthetic, weather and age naturally, and are an earth-friendly alternative to plastic construction. To ensure 100% water- and weatherproofing, all Rockustics products come as a sealed unit. Therefore, the inclusion of optional transformers must occur prior to completion by manufacturer. Rockustics and MSE Audio constantly develops new technologies that enhance audio product performance. Rockustics innovations are protected by multiple U.S. and international patents. MSE Audio actively defends its patents in order to protect Rockustics resellers and end

users.

Patented Rockustics Technologies

Rockustics and MSE Audio Group constantly develop new technologies that enhance audio product performance. Rockustics innovations are protected by multiple U.S. and international patents, which explicitly cover Rockustics dispersion, enclosure and dome technologies. MSE Audio Group actively defends its patents in order to protect Rockustics resellers and end users.

Technical Data and Specification Tools

Technical Data

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data are available from SoundTube Entertainment or at www.soundtube.com. Technical data and downloads include: EASE™

Rocquette™ SweetSpot

ROCQUETTE™
SWEETSPOT



data - 3-D polar plots.
EASE™ Address - 2-D
modeling for distributed
systems Autodesk® Revit®
software Tech Sheets -
Technical information and
architectural specs for
system engineers
SoundTubeSPEC™ -
Proprietary speaker
placement software

Data Acquisition and Verification

All data for SoundTube
speakers are independently
collected from and verified
by NWAALabs
(www.nwaalabs.com) using
their proprietary MACH
testing system. All data are
collected and analyzed
according to ASTM, ISO and
AES standards using EASRA,
TEF and MLSSA. Full
balloon data including both
phase and magnitude are
compiled into a variety of
formats including EASE 4.x,
GLL and CLF.

Architectural Specifications

The loudspeaker shall be an
on-ground, coaxial design
consisting of one 165.1 mm
(6.5 in) low-frequency
transducer and one 25 mm
(1.0 in.) high-frequency

transducer. The low-
frequency voice coil
diameter shall be 25 mm
(1.0 in). Performance
specifications of a typical
production unit shall be as
follows: Usable frequency
response shall extend from
76 Hz- 22 kHz. Measured
sensitivity (2.83 Volt input, 1
meter) shall be at least 88
dB. The loudspeaker shall
have a nominal impedance of
4 Ohms. The enclosure shall
be constructed of a non-
polluting elastomer
reinforced resin polymer
with pulverised stone. Color
options shall be brown, gray
or sandstone. All
transducers and network
circuitry are weather
resistant and ship in a sealed
enclosure. The external
wiring input connector shall
be hardwire leads. The
overall cabinet dimensions
shall be no more than 228.6
mm (9.0 in) in height by
393.7 mm (15.5 in) in width
by 279.4 mm (11.0 in). The
unit shall weigh no more
than 7.3 kG (16 lbs). The
system shall be the
Rocquette for both low and
high impedance
applications.

Rockustics

8005 W 110th Street, Suite
208
Overland Park, KS 66210
Phone 913.663.5600
Fax 913.663.3200
Toll Free (855) 663-5600
<http://rockustics.mseaudio.com>
All SoundTube products come
with a 5-year limited warranty.

Rocquette™ SweetSpot

ROCQUETTE™
SWEETSPOT



Optional Accessories



Security Bracket (RSB1)