

# Osprey® 845e

Video capture card

## Four Input SDI or DVB-ASI

Ideal for high-density applications, the Osprey 845e card features four independent, highly configurable input channels.

### Four Input Formats


- 3G SDI (424M) (limited to 2 channels)
- HD SDI (292M)
- SD SDI (259M)
- DVB-ASI MPTS/SPTS (Windows only)

### Fully Independent Inputs

All inputs are clock independent, which allows for different input formats on each input.

### Embedded SDI audio

Four stereo pairs are available per input.

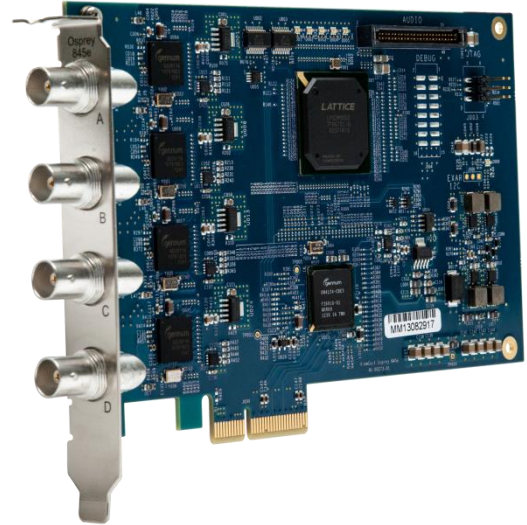

### Osprey SimulStream®

A standard feature on all Osprey 800 series cards, SimulStream allows each input to produce multiple parallel output streams with completely independent settings for color space, cropping, scaling, closed caption and overlays facilitating simultaneous delivery to multiple applications.

### Additional Features

**Signal Loss:** In the event of signal loss, the Osprey card automatically replaces the lost video with color bars with options for text overlay and audio tones. This feature helps prevent unplanned stoppage of downstream applications upon signal loss.

### Video Pre-Processing

- VBI/VANC closed-caption extraction/on-screen rendering
- Logo/bitmap overlay
- Scaling, cropping, de-interlacing and inverse telecine
- ProcAmp control
- Vector Scope and Luma Scope

### Driver Support

- Microsoft® DirectShow® API
- Linux

**Osprey SDK:** An Osprey SDK is also available to allow developers to take full advantage of the Osprey 800e driver capabilities.

### Osprey 800a Audio Input Expansion Board


The Osprey 800a audio input card is a separate expansion board that adds two pairs of balanced audio via XLR connectors along with an two additional pairs that can be configured as either unbalanced (RCA), AES/EBU or SPDIF (RCA).

See the Osprey 800a audio input card datasheet for details.



# Osprey<sup>®</sup>

## Video

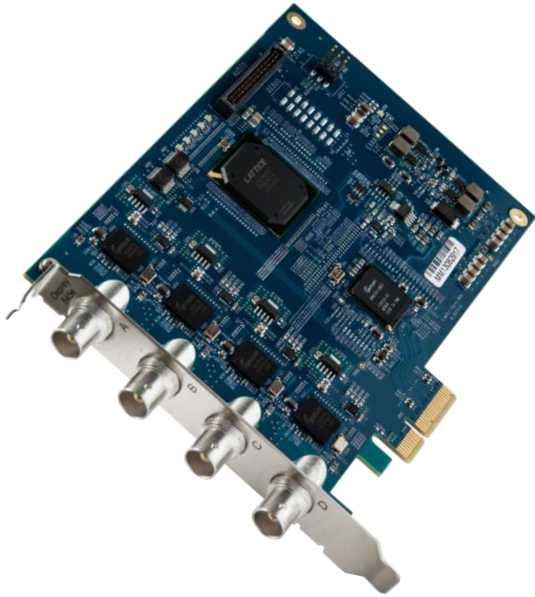

### Specifications

**Description:**

Four channel SDI HD/SD DVB-ASI

**Format:**

PCI Express (x 4):  
Slots: x 4, x 8, or x 16  
PCIe 1.1

**Video Input:**

3G SMPTE 424M x 2  
HD SMPTE 292M x 4  
SD SMPTE 259M x 4  
DVB-ASI X4

**Video Connector:**

SDI (BNC x4)

**Optional Audio Features:**

Optional: 2x stereo balanced XLR\*  
Optional: 2x stereo unbalanced RCA\*  
Optional: 2x stereo balanced XLR or AES/EBU or SPDIF\*  
\*with available Osprey 800a input card

**Video Modes:**

1080i 50, 59.94, 60  
1080p 23.98, 24, 25, 29.97, 30  
720p 23.98, 24, 25, 29.97, 50, 59.94, 60  
720 x 480 29.97, 30/i (NTSC)  
720 x 576 25/i (PAL)  
720 x 576 25, 50/p

**3G SDI:**

1080p 50, 59.94, 60

**Audio Input:**

Embedded SDI (4 stereo pairs per SDI input)

**Available Drivers:**

Microsoft Windows  
Linux

For more information on the latest OS compatibility, please visit [www.ospreyvideo.com](http://www.ospreyvideo.com)

**Dimensions:**

6.60" L x 4.38" H (16.76cm L x 11.13cm H)  
Full height/half length

**Weight:**

≈ 122 g

**Power Consumption:**

9.36W

**Operating Temp Range:**

0° to 40° C

**Non-Operating Temp Range:**

-40° to +75° C

**Rel Humidity Operating:**

Between 5 % and 80 % (noncondensing)

**Rel Humidity Non-Operating:**

95 % RH (non-condensing); gradient 30% per hour

**Operating Altitude Range:**

0 to 3,048 meters (10,000 feet)

**Non-Operating Altitude Range:**

0 to 15,240 meters (50,000 feet)

**System recommendations:**

High quality video capture requires a PCIe bus with direct access to the CPU

**Warranty:**

1 year limited hardware warranty

**Compliance:**

CE, FCC, ROHS, WEEE

20160830

© 2016 Osprey Video. Osprey®, SimulStream® and Ceylon® are registered trademarks of Osprey Video AG. All other trademarks are the property of their respective owners. Product specifications and availability may change without notice.

North America 800 251 7900 | Europe / Africa/ Asia / Middle East +1 800 251 7900 | [www.ospreyvideo.com](http://www.ospreyvideo.com)