



Product description

The Tannoy VSX 15DR is a high power handling direct radiating subwoofer, designed to extend low frequency response and increase system headroom in conjunction with Tannoy VX and VXP Series full range loudspeakers, as well as offering a highly potent low frequency device for use with many of Tannoy's other systems, such as VLS Series or DVS Series.

Extending overall frequency response to below 40 Hz, the VSX 15DR can be deployed as part of any system designed to provide high impact background music in applications ranging from clubs, bars and cafes, right through to theatres and AV presentations.

The VSX 15DR utilises a single high efficiency 380 mm (15") drive unit mounted in a compact and sturdy, black or white painted plywood cabinet which is constructed from 18 mm (0.71") multi-ply birch hardwood. This heavy-duty construction ensures it is designed to survive the punishment that speaker systems are subjected to on the road and in club installations.

Featuring a rugged and durable birch ply enclosure, with ergonomic Integrip™ carry handles and integrated, recessed termination panels with NL4 speakON and barrier strip connections for ease-of-install, the VSX 15DR is a highly flexible subwoofer. As well as fixed install, VSX 15DR can easily be coupled with VX Series and VXP Series and VLS Series column loudspeakers for portable/live PA applications thanks to an integrated pole-mount recess and the optional VTH pole mount.

Features

- 380 mm (15") drive unit mounted in direct radiating configuration
- High performance LF driver design delivering exceptional bass response
- Recessed Integrip handles for ease of handling
- Recessed termination panels for flush mounting of connectors
- Recessed pole-mount locations for use in portable PA applications
- Rugged plywood construction finished with textured black or white paint
- Improved aspect ratio, deeper volume, more compact front


The versatility and impressive performance of this subwoofer make it ideal for applications such as live sound reinforcement, nightclub sub bass, theatre front of house and effects, movie theatres and cinemas, side fill in large scale music reinforcement, theme parks and leisure venues, sports and multi-use stadiums, audio visual, high quality public address and houses of worship.

Physical data

Dimensions HxWxD:	508 mm x 580 mm x 580 mm, (20.0" x 22.8" x 22.8")
Weight:	35.5 kg (78.4 lbs)
Enclosure:	138 litres, 18 mm birch plywood, internally braced
Finish:	Textured black or white paint (custom colours on request) Powder coated perforated steel grille, Airmet cloth behind

Applications

- Night club or bar system
- Performing arts spaces
- High output retail (eg. fashion stores)
- Live sound reinforcement
- Sports arenas
- Visitor attractions
- Auditoria

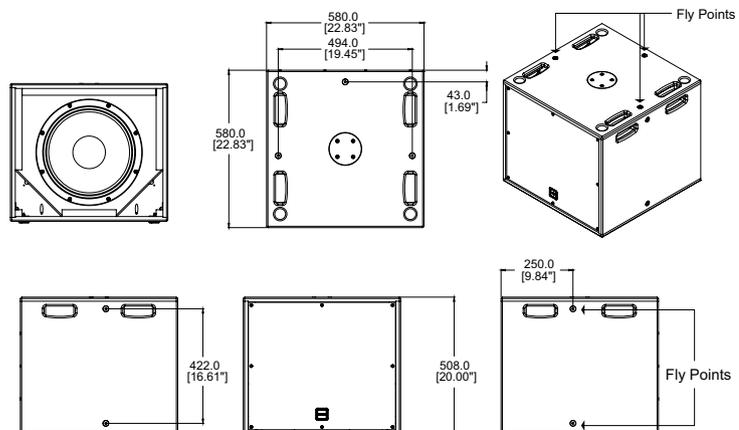

Technical Data Sheet

Specifications

VSX 15DR

Performance

System type	Direct radiating subwoofer
Frequency response (-3 dB) ⁽¹⁾	45 Hz - 3 kHz
Frequency response (-10 dB) ⁽¹⁾	36 Hz - 4 kHz
System sensitivity (1 W @ 1 m) ⁽²⁾	97 dB (1 W = 2.83 V for 8 ohms)

Power Handling

Average ⁽²⁾	800 W
Programme	1600 W
Peak	3200 W
Recommended amplifier power	1600 W @ 8 ohms

Rated maximum SPL ⁽²⁾

Average	126 dB
Peak	132 dB
Nominal impedance	8 ohms
Driver complement	1 x 380 mm (15") bass driver
Recommended crossover	80 Hz - 500 Hz, 24 dB / octave
	Recommended high-pass filter 40 Hz, 24 dB / octave

Distortion

10% full power (28.3 V)	Harmonics		
	50 Hz	2nd	3rd
	100 Hz	1.22%	1.18%
		0.40%	0.30%
1% full power (8.9 V)			
	50 Hz	0.47%	0.50%
	100 Hz	0.15%	0.17%

Construction

Enclosure	138 litres, 18 mm birch plywood, internally braced
Finish	Textured black or white paint (custom colours on request) Powder coated perforated steel grille, Airtex cloth behind
Connectors	2 x speakON NL4MP and barrier strip
Fittings	12 x M10 flying inserts (portrait or landscape mounting) 4 x Integrip carrying handle

Physical

Dimensions HxWxD	508 mm x 580 mm x 580 mm, (20.0" x 22.8" x 22.8")
Packed quantity	1
Net weight	35.5 kg (78.4 lbs)
Shipped weight	40 kg (88.2 lbs)

Ordering Information

Part Number	Colour
8001 7120	Black
8001 7121	White



Notes:

1. Average over stated bandwidth, measured at 1 metre on axis.
2. Unweighted pink noise input, measured at 1 metre in half space.

A full range of measurements, performance data, and Ease™ Data can be downloaded from www.tannoy.com/pro

New materials or manufacturing methods introduced through Tannoy's policy of continuous research and development may result in variances; however, performance will meet or exceed published specifications, which Tannoy reserves the right to alter without prior notice.

Copyright (c) 2015 Tannoy Limited. All rights reserved.