


CVD4200

(2) Stranded Coax, 26 AWG, Plenum

Description S-Video Coax Cable - (2) 26 AWG Coax - Stranded Conductors - Plenum

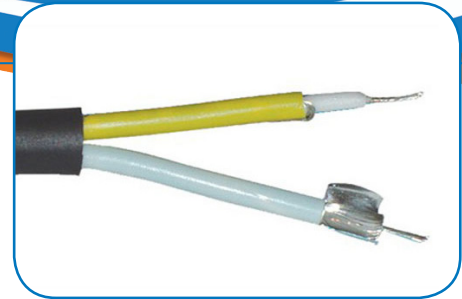

Technical Specifications

Element 1

Coaxes: 26 AWG (7/34), Tinned Copper, Stranded
 Dielectric: Natural Foamed Fluorinated Ethylene Propylene, 0.072" Diameter
 Outer Shield: Aluminum (In) / Polyester Tape, 25% Overlap
 Inner Shield: 38 AWG Tinned Copper, 97% Coverage
 Jacket: Polyvinyl Chloride, 0.009" Wall Thickness 0.102" +/- 0.003" Diameter

Construction

Number of Coaxes: 2
 Color Code: 1. White 2. Yellow
 Outer Jacket: Polyvinyl Chloride, 0.014" Wall Thickness
 Final Diameter: 0.236"
 Color: Dark Blue

Approximate Weight:

36 lbs. per 1000 ft.

Electrical Characteristics

Impedance: 75 Ohms Nominal
 Capacitance: 16 pF / ft. Nominal
 Time Delay: 1.20 ns / ft. Nominal
 Velocity of Propagation: 83%

Conductor Specifications

Nominal Attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.60
100	-5.10
200	-7.40

UL Listing

Type CMP as Specified in Article 800 of the National Electric Code