


P-5C28-1P-5W-F

(5) 28 AWG Coax, STP, (5) Wires, Plenum

Description RGB Coax Cable - Fully Pinned VGA with Audio - Plenum

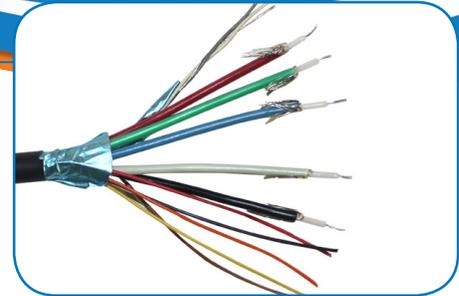

Technical Specifications

Element 1

Conductor: 28 AWG Tinned Stranded Copper
Insulation: Foamed Fluorinated Ethylene Propylene, 0.062" Diameter
Color Code: Natural
Outer Shield: Aluminum (In) / Mylar Tape, 25% Min. Overlap
Inner Shield: 36 AWG Tinned Copper, 95% Coverage
Jacket: PVC Alloy, 0.094" Diameter
Color Code: 1. Red 2. Green 3. Blue 4. Black 5. White

Element 2

Conductor: 28 AWG Tinned Stranded Copper
Insulation: PVC Alloy, 0.035" Diameter
Color Code: 1. White 2. Gray
Shield: Aluminum (In) / Mylar Tape, 25% Min. Overlap
Drain: 28 AWG Tinned Stranded Copper

Element 3

Conductor: 28 AWG Tinned Stranded Copper
Insulation: PVC Alloy, 0.035" Diameter
Color Code: 1. Black 2. Brown 3. Red 4. Orange 5. Yellow

Construction

Insulation: PVC Alloy
Diameter: 0.307" Nominal
Color: Covid Blue
Shield: Aluminum (In) / Mylar Tape, 25% Min. Overlap
Drain: 28 AWG Tinned Stranded Copper

Approximate Weight:

75 lbs. per 1000 ft.

UL Listing

Type CMP as Specified in Article 800 of the National Electric Code