TECHNICAL SPECIFICATIONS

VIDEO				
Format	RGBHV, RGsB, YUV, Y/C, CVBS			
Resolution	Up to 1920 x 1200, VGA, SVGA, XGA, SXGA			
Input Connector Type	(1) HD 15 socket female			
Output Connector Type	(1) HD 15 socket female			
AUDIO				
Signal Type	Stereo unbalanced			
Input Interface	(1) Connector 3.5mm jack socket			
Output Interface	(1) Connector 3.5mm jack socket			
IR				
Input Interface (TX)	(1) 3.5 mm (Female)			
Output Interface (RX)	(1) 3.5 mm (Female)			
IR Frequency Range	30KHz to 80KHz			
Emitter Distance	Up to 10'			
Connector	3.5mm Stereo jack for emitter and IR eye			
OTHER				
RS-232	(1) DB9 Female, 9600 bps, N, 8 1, No flow control			
Power	5VDC2A			
Weight	.75 lbs.			
Dimensions	1.25"H x 4.75D x 9"W			

OPTIONALLY AVAILABLE

RECEIVERS SUPPORTED

XTPro-RX, XTAV-RX, XTWALL-RX, XTPro XTREEM-RX

PART NO.	QTY	DESCRIPTION
CC-MMAMM-06	1	Audio 3.5 mm stereo miniplug cable
SM-EYE	1	IR EYE Receiver
SM-LED	1	IR Emitter
CCRS232-06	1	6' RS232 cable

WHAT'S IN THE BOX

PART NO.	QTY	DESCRIPTION
XT-TX400S	1	UXGA/Audio/IR/RS-232 point- to multi-point CAT5 Extender, 4 -Port Transmitter.
PS5VDC2A	1	Power Adapter
	1	Quick Start Guide

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose.

SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI Technologies, Inc.

20161213



Designed and Manufactured in the USA

800.AVI.2131

Tel: (818) 503-6200 | Fax: (818) 503-6208 11651 Vanowen St. North Hollywood, CA 91605

SmartAVI.com



XT-400

VGA Distribution System Using CAT5
Unshielded Twisted Pair Cabling



Use a single CAT5 cable to broadcast high resolution SXGA, stereo audio, RS232 and IR to 4 stations up to 1,000 feet away

Quick Start Guide


INTRODUCTION

The XT-400 range of products allows the extension of a wide range of video and audio formats, RS-232 and IR to up to 4 locations using Category 5 Unshielded Twisted Pair (UTP) cables.


With RS232 communication support the XT400 allows users to send commands to single or multiples devices. This allows the user to change volume, channel or turn on/off the remote LCD TV.




CONNECTING THE XT-400 TO AN OPTIONAL RECEIVER (XTPRO-RX)



CONNECTING THE XT-400 TO AN OPTIONAL RECEIVER (XTAV-RX)



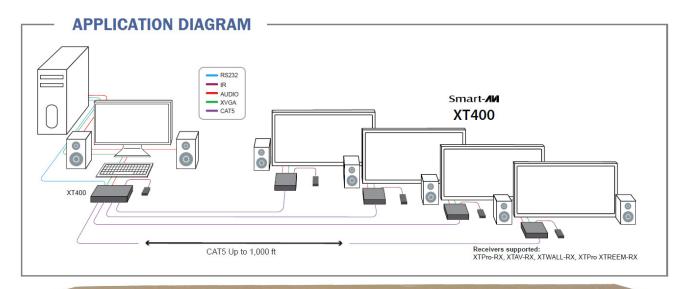



CONNECTING THE XT-400 TRANSMITTER

- 1. Connect the output of the computer video card to the video input of the transmitter using the included male to male video cable.
- 2. Optionally connect the output of the computer audio card to the audio input of the transmitter using 3.5mm audio male to male audio cable.
- 3. Connect local monitor to the VGA out of the transmitter.
- Optionally connect external speakers to the transmitter's audio out (Standard 3.5mm stereo miniplug).
- 5. Connect CAT5 cables to outputs 1-4.
- *NOTE: You can not use RS232 and IR at the same time.

CONNECTING THE RECEIVER

- 1. Connect CAT5 cable (coming from the transmitter) to the back of the receiver.
- 2. Connect 1-4 display monitors to the VGA out connectors on the receiver.
- 3. Optionally connect 1-4 sets of external speakers to the audio connectors on the receiver. (Standard 3.5mm stereo Miniplug)

Sending an RS232 command to a remote monitor

In order to send a command to a remote monitor, you need to use the following query at 9600 baud rate, N,8,1, No flow control.

//M01<CR>

After sending this query, any command sent from the PC will go directly to output 1 To send a command to output 2 replace "MO1" with "MO2" etc...

To send the same command to all outputs (but only output 1 will answer) Use the following command; //M00<CR>

*<CR> = Carriage return