

What's in the Box?

PART NO.	QTY	DESCRIPTION
HDXP-TX	1	HDX-Plus Transmitter
HDXP-RX	1	HDX-Plus Receiver
PS5VD2A-1	2	Power Supply
SM-EYE-3		Infrared Receiver
SM-LED-3		Infrared Emitter

Technical Specifications

VIDEO	
Format	HDMI 1.3 and HDCP compliant
HDTV Resolutions	480p, 720p, 1080i, 1080p/60Hz/48bit
TV Resolution	480i
Input Interface (TX)	HDMI Type A 19-pin Female TMDS
Output Interface (RX)	HDMI Type A 19-pin Female TMDS
Input Cable Length (TX)	Up to 40 ft.
Output Cable Length (RX)	Up to 40 ft.
AUDIO	
Format	Dolby TrueHD, DTS-HD MA
Input Interface	HDMI (Integrated)
Output Interface	HDMI (Integrated)
IR	
Signal Type	38 KHz
Interface	3.5 mm Jack Socket (Female)
RS-232	
Baud Rate	Up to 19,200 bps
Input Interface (TX)	DB-9 (Serial) Female
Output Interface (RX)	DB-9 (Serial) Male
SYSTEM	
Interface	RJ-45
Cable Requirements	CAT5/5e/6
Maximum Length	200 feet (60 meters)
OTHER	
Power	External 100-240 VAC/5VDC2A @10W
Dimensions	5"W x 1.125"H x 4.125"D
Weight	0.6 lbs.
Approvals	UL, CE, ROHS Compliant
Operating Temp.	32-131°F (0-55 °C)
Storage Temp.	-4-185 °F (-20-85 °C)
Humidity	Up to 95%

© Copyright 2013 Smart-AVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

Installation Manual

HDX-Plus

HDMI, IR and RS-232 Extender over **two** CAT5 UTP/STP Cables



Watch and Control HDTV 1080p video over 200ft (60m) from the source

*replaces the HDX-1000

Smart-AVI
SMART AUDIO VIDEO INNOVATION

SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St., North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

www.smartavi.com

Introduction

The HDX-Plus uses **two** CAT5 UTP/STP cables to extend HDMI signals such as HDTV output over 200ft (60m) from the source. It is capable of transmitting high-resolution HD video up to 1080p. Controlling your video source is easy with the HDX-Plus's bi-directional IR and RS-232 extension. Whether it's for a home entertainment system or a commercial installation, the HDX-Plus delivers flexibility and control.

Features

- Extends HDMI output over two CAT5/5e/6 UTP/STP cables
- Extends IR and RS-232 control signals for remote control
- Delivers uncompressed HD video up to 1080p@60Hz@48bits and 3D
- Data signals up to 3.4Gbps
- HDMI 1.3 and HDCP compliance
- IR and RS-232 communication are bi-directional
- Transmits high-quality Dolby TrueHD, DTS-HD MA audio signals
- Transmits 1080p resolution over 200 feet (60 meters) from the source


Applications

- Home Theater
- Corporate or Educational Presentations
- Call Centers
- Industrial
- Information Terminals/Kiosks
- Airport Installations
- Educational Environments

For Better Performance

Use 2 x CAT6/STP 23 AWG Cables.

HDX-Plus - Installation Diagram

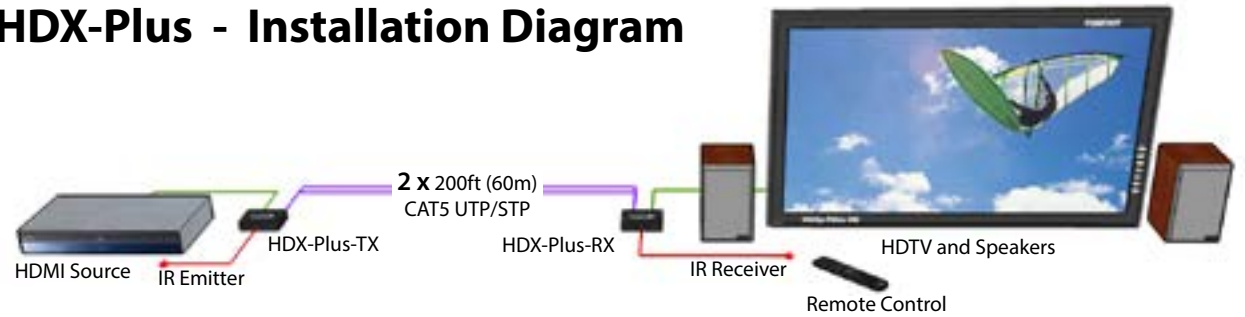

Installation

1. Power off the HDMI source, display and speakers.
2. Connect an HDMI cable from the HDMI source to the HDMI port on the HDX-Plus transmitter.
3. Connect an IR emitter/receiver (optional) to the IR ports on the HDX-Plus transmitter.
4. Connect an RS-232 compliant device (optional) to the RS-232 port on the HDX-Plus transmitter.
5. Connect the HDX-Plus transmitter to the HDX-Plus receiver using two CAT5 UTP/STP cables (up to 200ft/60m).
6. Connect an IR emitter/receiver (optional) to the IR ports on the HDX-Plus receiver.
7. Connect an RS-232 compliant device (optional) to the RS-232 port on the HDX-Plus receiver.
8. Connect an HDMI cable from the HDMI port on the HDX-Plus receiver to the HDMI Display.
9. Power on the HDX-Plus transmitter and receiver by plugging in their power adapters (5VDC2A).
10. Power on the HDMI source, displays and speakers.



HDX-Plus-TX-Front



HDX-Plus-TX-Rear





HDX-Plus-RX-Front




HDX-Plus-RX-Rear

RS-232 SPECIFICATIONS

CONNECTOR	PIN	NAME	DESCRIPTION
DB9 MALE - RECEIVE 	2	RxD	Receive Data on DB9 Male
	3	TxD	Transmit Data on DB9 Male
	5	SGND	Ground
DB9 FEMALE - TRANSMIT 	2	TxD	Transmit Data on DB9 Female
	3	RxD	Receive Data on DB9 Female
	5	SGND	Ground

CAT5/5e/6 CABLE SPECIFICATIONS

CONNECTOR	PAIR	PINS
RJ-45 MALE 	1	1 & 2
	2	3 & 6
	3	4 & 5
	4	7 & 8
CAPACITANCE		14 pf/ft (46.2 pf/m)
CONDUCTOR GAUGE		24 AWG
IMPEDANCE		60 +/- 15 ohms