



| | CI620 PRODUCT SPECIFICATIONS | | | |
|---------------------------|--|--|--|--|
| NOMINAL IMPEDANCE | 16Ω | | | |
| SENSITIVITY dB @ 2.83V/1M | 85 dB | | | |
| FREQUENCY RESPONSE | 60 Hz - 22 kHz | | | |
| RECOMMENDED POWER | 10 - 80 Watts | | | |
| TAP SELECTOR | Six-Position Rotary Switch or Transformer Bypass Position | | | |
| TWEETER | 1" (25.4 mm) Silk Dome | | | |
| MIDRANGE | N/A | | | |
| WOOFER | 6.5" (165.1 mm) Polypropylene w/ Butyl Rubber Surround | | | |
| ENCLOSURE MATERIAL | Drawn Steel Backcan w/ ABS Baffle | | | |
| ENCLOSURE TYPE | Ported | | | |
| INPUTS | Ceramic Terminal Connector | | | |
| GRILLE | Painted Steel | | | |
| COLOR OPTIONS | Black or White | | | |
| DIMENSIONS | 11.75" (298.5 mm) Diameter x 5.75" (146.1 mm) Depth | | | |
| CUTOUT DIMENSIONS | 10.5" (266.7 mm) Diameter | | | |
| MOUNTING DEPTH | 6.09" (154.7 mm) | | | |
| WEIGHT | 8 lbs | | | |
| SHIPPING WEIGHT | 9 lbs | | | |
| INCLUDED ACCESSORIES | Tile Bridge, UL-Listed Flex Conduit Clamp, Paint Shield | | | |
| OPTIONAL ACCESSORIES | Pre-Construction Bracket (AC-Cl20-PCB), Tile Bridge (AC-Cl20-TB) | | | |
| REGULATORY - UL | UL1480 & 2043 Approved | | | |
| REGULATORY - CE | Approved | | | |
| RoHS | Approved | | | |

Description:

The Cl620 is a 6.5" coaxial in-ceiling speaker in a steel backcan with a tuned front port.

Mounting hardware is included as well as a SpeedWing^M constant-tension fixed-wing mounting system. The Cl620 also features a six-position tap switch enables 25-, 70.7- and 100-volt applications with a transformer bypass position into 16 Ω .

Features:

- One 6.5 inch polypropylene woofer with butyl rubber surround
- One 1 inch silk dome tweeter
- Limited Lifetime Warranty
- Auto-Reset Overload Protection
- Absolute Phase Crossover Network
- Painted White Steel Grille
- Included Accessories: color-coded tile bridge, conduit clamp, paint shield
- Optional Accessories: pre-construction bracket (AC-Cl20-PCB), tile bridge (AC-Cl20-TB)
- UL 1480 & 2043 Approved

Applications:

Engineered for home theater or distributed audio applications where high-efficiency, added bass response and rapid installation are critical.

Transformer Taps:

| 70.7 V | OUTPUT | 100 V | OUTPUT | 25 V | OUTPUT |
|--------|--------------------|-------|----------|-------|---------|
| 32 W | OUTPUT 105.5 dB | 32 W | 105.0 dB | 4 W | 96.0 dB |
| 16 W | 102.0 dB | 16 W | 102.0 dB | 2 W | 93.0 dB |
| 8 W | 99.0 dB | 8 W | 99.0 dB | 1 W | 90.0 dB |
| | 96.0 dB | 4 W | 96.0 dB | 0.5 W | 87.0 dB |
| 2 W | 93.0 dB | | | 0.3 W | 84.0 dB |

Warranty Information:

The Cl620 comes with a limited lifetime warranty. Products not sold through an authorized dealer/distributor will not be supported by the factory warranty. Warranties are non-transferable.

Phase Technology:


8005 W 110th St Suite 208 Overland Park, KS 66102 Phone: 913.663.5600 Toll Free: 855.663.5600 Fax: 913.663.3200 www.phasetech.com







6.5" Coax In-Ceiling w/ Integrated Metal Back Can & Bypassable 25/70.7/100 V Transformer


Mechanical Drawings

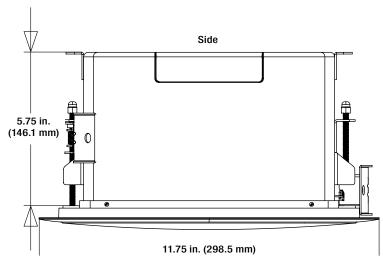


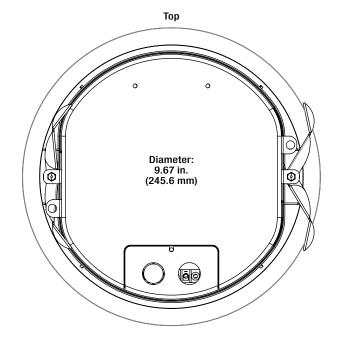

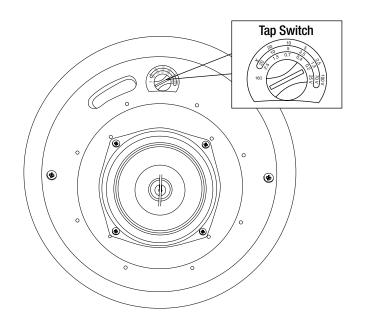

Optional Accessories Pre-Construction Bracket (AC-Cl20-PCB)

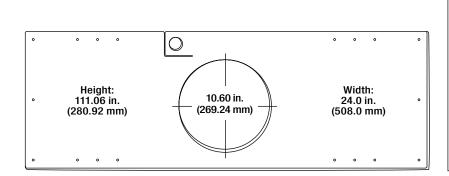

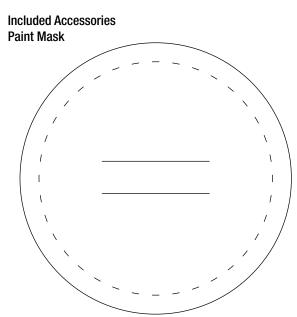

Tile Bridge (AC-Cl20-TB)

