

## Ethernet Extender over Coax with PoE\*


### NE-AE01-030TQ

#### Features:


- Extends powered Ethernet devices, such as cameras with PoE, over existing coax cables
- Connects cameras with PoE to 10/100BaseT PoE Injector/Switches over single coax cable
- Supports PoE: IEEE802.3af/at
- Supports 10/100 Mbps transmission rate
- Can extend up to 984ft (300m)
- Sold as a set



#### Overview:

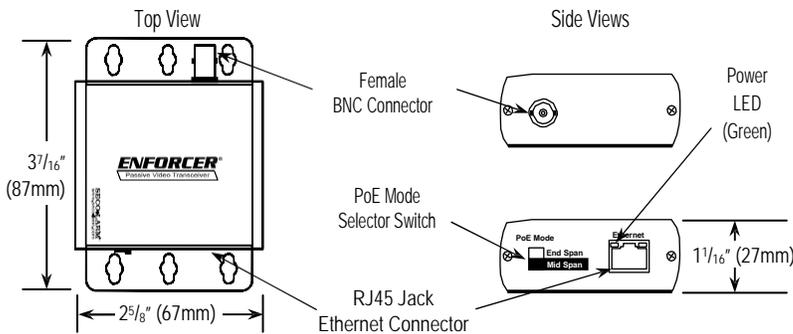

#### Sample:

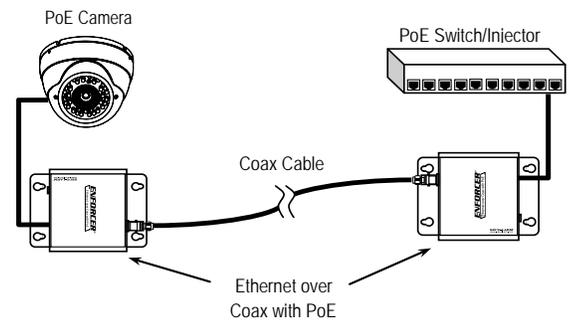

#### Specifications:

Link Connection	BNC
Ethernet Connection	RJ45
Linking Cable	75Ω coax cable
Ethernet speed	10/100 Mbps
Transmission Distance (maximum)	984ft (300m)
PoE Standard	IEEE 802.3af/ IEEE 802.3at
PoE mode setting	Mid-span/ End-span
LED indicator	Power (green)
Power consumption	1.25W
Operating Temperature	32° ~131°F (0° ~55°C)
Dimensions	2 5/8" x 3 7/16" x 1 1/16" (67x87x27cm)
Weight	5.3-oz (150g)

#### Also Available from SECO-LARM®:

PoE Surge Protectors  
IPV-P188Q



PoE Injectors  
NJ-P101M-PQ



PoE Repeaters  
NR-P101FQ/TQ



Ethernet over Coax  
IPB-A1200Q



Ethernet Extenders  
IPB-A1100Q



Basic Ethernet Extenders  
NE-SE01-020Q



\*Works only with PoE compatible devices

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®**

NE-AE01-030TQ\_151014.docx