
datavideo



DC TO DC12/7.2V 4.0A CONVERTER DDC-4012H Instruction Manual

www.datavideo.com

Table of Contents

FCC COMPLIANCE STATEMENT	
WARNINGS AND PRECAUTIONS	3
WARRANTY	4
STANDARD WARRANTYTHREE YEAR WARRANTY	
DISPOSAL	5
INTRODUCTION	7
EXAMPLE PD-6 SET UP	7
4 PIN XLR CONNECTIONS	8
SPECIFICATIONS	9

Disclaimer of Product & Services

The information offered in this instruction manual is intended as a guide only. At all times, Datavideo Technologies will try to give correct, complete and suitable information. However, Datavideo Technologies cannot exclude that some information in this manual, from time to time, may not be correct or may be incomplete. This manual may contain typing errors, omissions or incorrect information. Datavideo Technologies always recommend that you double check the information in this document for accuracy before making any purchase decision or using the product. Datavideo Technologies is not responsible for any omissions or errors, or for any subsequent loss or damage caused by using the information contained within this manual. Further advice on the content of this manual or on the product can be obtained by contacting your local Datavideo Office or dealer.

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warnings and Precautions



- ${\bf 1.} \qquad {\bf Read \ all \ of \ these \ warnings \ and \ save \ them \ for \ later \ reference.}$
- 2. Follow all warnings and instructions marked on this unit.
- Unplug this unit from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- 4. Do not use this unit in or near water.
- Do not place this unit on an unstable cart, stand, or table. The unit may fall, causing serious damage.
- 6. Slots and openings on the cabinet top, back, and bottom are provided for ventilation. To ensure safe and reliable operation of this unit, and to protect it from overheating, do not block or cover these openings. Do not place this unit on a bed, sofa, rug, or similar surface, as the ventilation openings on the bottom of the cabinet will be blocked. This unit should never be placed near or over a heat register or radiator. This unit should not be placed in a built-in installation unless proper ventilation is provided.
- This product should only be operated from the type of power source indicated on the marking label of the AC adapter. If you are not sure of the type of power available, consult your Datavideo dealer or your local power company.
- Do not allow anything to rest on the power cord. Do not locate this unit where the power cord will be walked on, rolled over, or otherwise stressed.
- If an extension cord must be used with this unit, make sure that the total of the ampere ratings on the products plugged into the extension cord do not exceed the extension cord rating.
- Make sure that the total amperes of all the units that are plugged into a single wall outlet do not exceed 15 amperes.
- Never push objects of any kind into this unit through the cabinet ventilation slots, as they may touch dangerous voltage points or short

- out parts that could result in risk of fire or electric shock. Never spill liquid of any kind onto or into this unit.
- 12. Except as specifically explained elsewhere in this manual, do not attempt to service this product yourself. Opening or removing covers that are marked "Do Not Remove" may expose you to dangerous voltage points or other risks, and will void your warranty. Refer all service issues to qualified service personnel.
- 13. Unplug this product from the wall outlet and refer to qualified service personnel under the following conditions:
 - a. When the power cord is damaged or frayed;
 - b. When liquid has spilled into the unit;
 - c. When the product has been exposed to rain or water;
 - d. When the product does not operate normally under normal operating conditions. Adjust only those controls that are covered by the operating instructions in this manual; improper adjustment of other controls may result in damage to the unit and may often require extensive work by a qualified technician to restore the unit to normal operation;
 - e. When the product has been dropped or the cabinet has been damaged;
 - f. When the product exhibits a distinct change in performance, indicating a need for service.

Warranty

Standard Warranty

- Datavideo equipment are guaranteed against any manufacturing defects for one year from the date of purchase.
- The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.
- The product warranty period beings on the purchase date. If the purchase date is unknown, the product warranty period begins on the thirtieth day after shipment from a Datavideo office.
- Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered under warranty.

- Viruses and malware infections on the computer systems are not covered under warranty.
- Any errors that are caused by unauthorized third-party software installations, which are not required by our computer systems, are not covered under warranty.
- All mail or transportation costs including insurance are at the expense of the owner.
- All other claims of any nature are not covered.
- Cables and batteries are not covered under warranty.
- Warranty only valid in the country or region of purchase.
- Your statutory rights are not affected.

Three Year Warranty

 All Datavideo products purchased after July 1st, 2017 are qualified for a free two years extension to the standard warranty, providing the product is registered with Datavideo within 30 days of purchase.



- Certain parts with limited lifetime expectancy such as LCD panels, DVD drives, Hard Drive, Solid State Drive, SD Card, USB Thumb Drive, Lighting, Camera module, PCIe Card are covered for 1 year.
- The three-year warranty must be registered on Datavideo's official website or with your local Datavideo office or one of its authorized distributors within 30 days of purchase.

Disposal



For EU Customers only - WEEE Marking

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate

collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner

that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

CE Marking is the symbol as shown on the left of this page. The letters "CE" are the abbreviation of French phrase "Conformité Européene" which literally means "European Conformity". The term initially used was "EC Mark" and it was officially replaced by "CE Marking" in the Directive 93/68/EEC in 1993. "CE Marking" is now used in all EU official


documents.

Introduction


The DDC-4012H supplies power to third party cameras or AV equipment. The DDC-4012H is designed to be used with the Datavideo PD-6 Power Distribution Unit and CB-22H/23H All-In-One Cable.

The DDC-4012H automatically accepts input voltages between 15 and 50V DC and provides regulated 7.2V, 8.4V or 12V DC output depending on its output switch setting. The unit allows 4pin XLR type input connections and has options for either 4pin XLR or 5.5mm PSU type output connections.

Example PD-6 Set Up

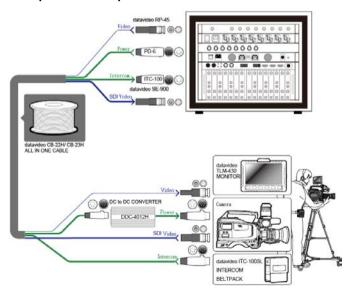

4 Pin XLR Connections



DC Input 15V DC ~ 50 V DC

Pin 1 = GND (-) Pin 2 = VCC (+) Pin 3 = NC Pin 4 = NC



DC Output 7.2V, 8.4V or 12V (4A Max)

Pin 1 = GND (-) Pin 2 = NC Pin 3 = NC Pin 4 = VCC (+)

Product IP Rating = IP20

This product is NOT water or weather proof.

Datavideo recommends that this product be used indoors.

If you wish to use this product on location or outside then please take all appropriate precautions to protect the unit from ingress and the user from risk of shock.

Specifications

Input	Voltage Range	15V~50V DC
	Efficiency (Typ.)	Up to 85%
Output	DC Voltage	7.2V / 8.4V / 12V
	Voltage Tolerance	±3%
	Rated Current	4 A
	Current Range	0~4 A
	Rated Power	48W
	Ripple & Noise(max)	<400mV
Protection	Over Load	105%~150% rated output power
		Protection type: Recovery automatically after fault condition is removed
Connector	DC Input 4 Pin XLR Male	Pin1:GND , Pin2:DC IN, Pin3/4:NC
	DC Output 4 Pin XLR Female	Pin1:GND , Pin2/3:NC , Pin4:DC OUT
	DC Output 5.5mm DC Jack	Center: DC Out , Shell: GND
Environment	Working Temp.	0°C to 40°C (32°F to 102°F)
	Working Humidity	10% to 90% (non condensing)
	Storage Temp. Humidity	-40°C to +85°C, 10~95% RH
Others	Dimension	115 mm x 50 mm x 35 mm (L x W x H)
	Weight	Approx. 0.3 kg/ 0.66 lbs
	Cable	UL 2464 ,18AWG, L=1M
	Slide Switch	Selected 7.2V, 8.4V or 12V output
	LED Lamp	Red: DC Out 12V, Amber: DC Out 8.4V Green: DC Out 7.2V

Service & Support

It is our goal to make owning and using Datavideo products a satisfying experience. Our support staff is available to assist you to set up and operate your system. Contact your local office for specific support requests. Plus, please visit www.datavideo.com to access our FAQ section.

Datavideo Technologies China Co 601, Building 10, No.1228, Rd, Jiangchang, Jingan District, Shanghai Tel: +86 21-5603 6599 Fax.*86 21-5603 6770 E-mail: service@datavideo.cn

Datavideo Technologies China Co No. 812, Building B, Wankai Center, No.316, Wan Feng Road, Fengtai District, Beijing, China Tel: +96 10-8566 9074 E-mail:service@datavideo.cn

Datavideo Technologies China Co B-823, Meinian square, No.1388, Middle of Tianfu Avenue, Gaoxin District, Chengdu, Sichuan Telt +86 28-8613 7786 Fax:+86 28-8513 6486 E-mail:service@datavideo.cn

Datavideo Technologies China Co A1-2318-19 Room, No.8, Aojiang Road, Taijiang District, Fuzhou, Fujian, China Tel: 0591-83211756 · 0591-83210187

Fax:0591-83211262 E-mail:service@datavideo.cn

Datavideo Technologies China Co 902, No. 1 business building, Xiangtai Square, No. 129, Yingxiongshan Road, Shizhong District, Jinan City, Shandong Province, China Tel: +86 531-8607 8813 E-mail:service@datavideo.cn Datavideo Hong Kong Ltd G/F.,26 Cross Lane Wanchai, Hong Kong

Tel: +852-2833-1981 Fax:+852-2833-9916 E-mail:info@datavideo.com.hk

Datavideo India Noida A-132, Sec-63, Noida-201307, India

Tel: +91-0120-2427337 Fax:+91-0120-2427338 E-mail: sales@datavideo.in

Datavideo India Rochi
2nd Floor- North Wing, Govardhan Building,
Opp. NCC Group Headquaters, Chittoor Road,
Cochin- 682035
Tel: +91 4844-025336
Fax:+91 4844-047666

E-mail: sales@datavideo.in

Datavideo Technologies Europe BV
Floridadreef 106
3565 AM Utrecht,
The Netherlands

Eav: +21 20 261 06 67

E-mail:info@datavideo.nl

Datavideo Visual Technology(S) Pte Ltd No. 178 Paya Lebar Road #06-07 Singapore 409030

Tel: +65-6749 6866 Fax:+65-6749 3266 E-mail:info@datavideovirtualset.com Datavideo Technologies (S) PTE Ltd No. 178 Paya Lebar Road #06-03 Singapore 409030

Tel: +65-6749 6866 Fax:+65-6749 3266 E-mail:sales@datavideo.sq

Datavideo Technologies Co. Ltd 10F. No. 176, Jian 1st Rd., Chung Ho District. New Taipei City 235. Taiwan

Tel: +886-2-8227-2888 Fax:+886-2-8227-2777 E-mail:service@datavideo.com.tw

7048 Elmer Avenue. Whittier, CA 90602, U.S.A. Tel: +1-562-696 2324 Fax:+1-562-698 6930 E-mail:sales@datayideo.com

Datavideo UK Limited Brookfield House, Brookfield Industrial Estate, Peakdale Road, Glossop, Derbyshire, SK13 6LQ Tel: +44-1457 851 000 Fax:+44-1457 859 964

Datavideo France s.a.r.l.
Cité Descartes 1, rue Albert Einstein
Champs sur Marne 774477 –
Marne la Vallée cedex 2
Tet. +33-1-60370246
Fax.+33-1-60376732
E-mail:info@datavideo.fr



Please visit our website for latest manual update. www.datavideo.com/Power+Distribution/DDC-4012H



All the trademarks are the properties of their respective owners. Datavideo Technologies Co., Ltd. All rights reserved 2018